


U-UTP Kabel 4x2xxAWG23 Kat. 6A LSZH hvid

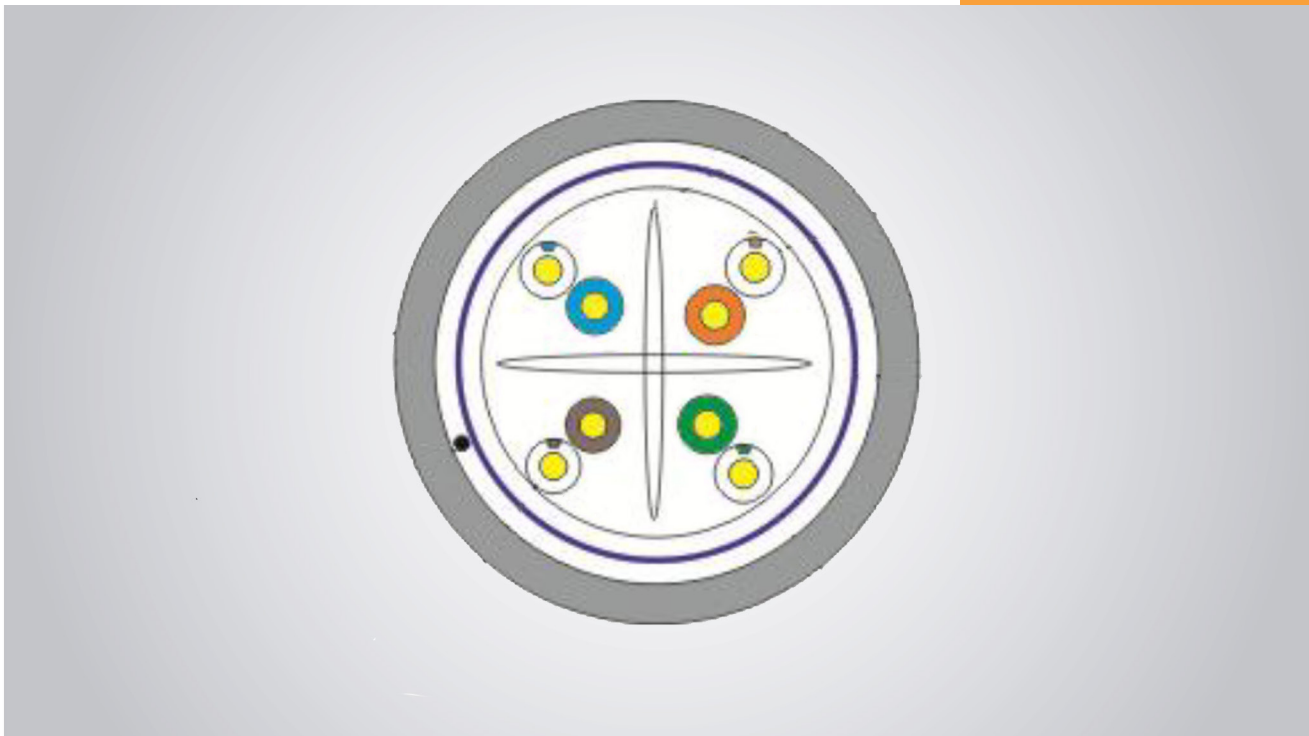

Anvendelse

Anvendes til højhastighedskabelsystemer, hvor behovet for stor datatrafik er tilstede.

Varenr.: 122183
EANnr.: 5706683028663

Specifikation

Kategori: 6A /UTP
Transmissionshastighed: 10Gbps
Frekvens: 500 Mhz
Impedans: 100 +/- 15 ohm
NVP værdi: 74 %
EMC klasse: C
CPR: Cca
DoP dok.: GL-122183
Antal par: 4 par
Leder: AWG23 massiv kobber
Lederisolation: PE
Kappe: LSZH hvid, RAL 9003
Standard: EIA/TIA 568B.
ISO/IEC 11801. EN 50173-2
Oplægning: Tromle 500 mtr.

U/UTP 4Pairs cable-category 6A-LSZH Sheath

Content of the Data Sheet										
Sheath Printing										
Customer No.		Customer Reference								
Category	U/UTP CAT6A-4P-LSZH									
Reference Standard	ISO/IEC11801、ANSI/TIA-568.2-D									
Conductor	Material	Solid-Bare Copper								
	Nom.O.D.(mm)	0.565	up	+0.005	down	-0.005				
Insulation	Material	HDPE								
	Diameter	1.12±0.05mm								
Wrapping	Polyester Tape+Isolation Wrap									
Sheath	Thickness	0.55±0.05 mm								
	External O.D.	7.2±0.5 mm								
	Surface	Clean,Frap,Satiation								
	Material	LSZH(complies RoHS)								
	Color	White								
Surface Printing	Letter height	3.0±0.3mm								
	Color	Black								
	Print error & Space	≤±0.5%, 1m								
Core Color	1 White- Blue /Blue	2 White-Orange /Orange								
	3 White-Green /Green	4 White- Brown /Brown								
Packing	Drum									
Carton dimension	According to the requires									
Packing length	305±1.5m									
Rip-cord	Yes	Drain wire	No							
	Before Aging Tensile Strength (Mpa)		≥10.0							
Sheath Physical Properties	Elongation(%)		≥125							
	Aging Period (°C×hrs)		100°C×24h×7d							
	After Aging Tensile Strength(Mpa)		≥8.0							
	Elongation(%)		≥100							
	Cold bend(-20±2°C×4h)		8×Cable O.D., No visible cracks							
	Impedance(Ω)		1.0-250.0MHz	100±15						
			250.0-500.0MHz	100±22						
Electrical Characteristics (20°C)	1.0-500.0MHz Delay Skew (ns/100m)		≤45							
	DC Resistance (Ω/100m) max		9.38							
	DC Conductor Resistance Unbalance (%) max		5.0							
Version	A/01	Date	2017-09-18	Revised By	Caihangle	Audited By	Nidonghua	Approved By	Nidonghua	

Technical Performance (100m) :				
Frequency (MHz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	PSNEXT ≥dB
1	20.0	—	74.3	72.3
4.0	23.0	3.8	65.3	63.3
8.0	24.5	5.3	60.8	58.8
10.0	25.0	5.9	59.3	57.3
16.0	25.0	7.5	56.2	54.2
20.0	25.0	8.4	54.8	52.8
25.0	24.3	9.4	53.3	51.3
31.25	23.6	10.5	51.9	49.9
62.5	21.5	15.0	47.4	45.4
100	20.1	19.1	44.3	42.3
200	18.0	27.6	39.8	37.8
250	17.3	31.1	38.3	36.3
300	16.8	34.3	37.1	35.1
500	15.2	45.3	33.8	31.8

Frequency (MHz)	ELFEXT ≥dB	PSELFEXT ≥dB	FSANEXT ≥dB	PSAACRF ≥dB
1	67.8	64.8	67.0	67.0
4	55.8	52.8	67.0	66.2
8	49.7	46.7	67.0	60.1
10	47.8	44.8	67.0	58.2
16	43.7	40.7	67.0	54.1
20	41.8	38.8	67.0	52.2
25	39.8	36.8	67.0	50.2
31.25	37.9	34.9	67.0	48.3
62.5	31.9	28.9	65.6	42.3
100	27.8	24.8	62.5	38.2
200	21.8	18.8	58.0	32.2
250	19.8	16.8	56.5	30.2
300	18.3	15.3	55.3	28.7
500	13.8	10.8	52.0	24.2