

GIGALAN

Smartere datakabling fra ende til anden

RJ45 IP modular plug FTP stiv/flex leder KAT6A



Anvendelse

Anvendes til montage af RJ45 Plug direkte på massivt kat kabel med stor AWG størrelse F.eks kat 6a. Bruges ofte ved installation af IP Kameraer. Kan anvendes til både skærmede og u-skærmede installationer.

Specifikation

Type: RJ45 Plug Skærmet

Pinne: 8 stk (8P8C)

Terminering: Skæreklemme


For leder diam: AWG 22+23

Kategori: 6A

Frekvens: 500 Mhz

Pakning: 1 stk

RJ45 IP modular plug FTP stiv/flex leder KAT6A

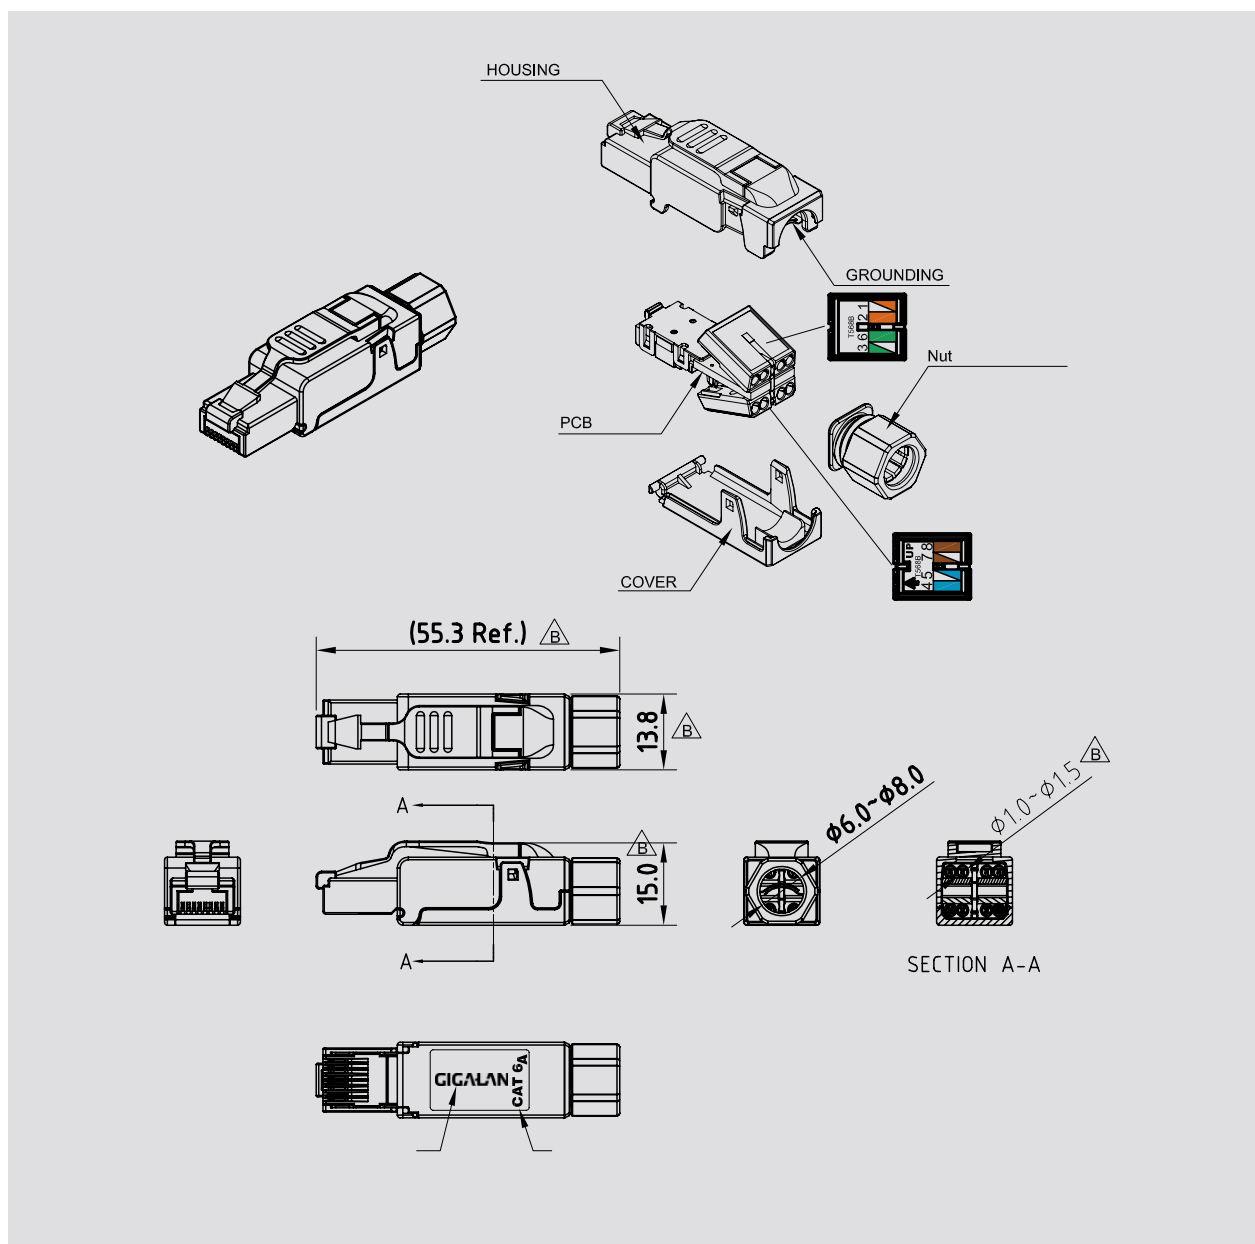

RJ45 IP modular plug FTP stiv/flex leder KAT6A

Transmission performance

Meet all requirements specified in Patch Cord requirement of

ISO/IEC 11801, Category 6 A
ANSI/TIA-568-C.2, Category 6A

Mechanical

IDC Wire Gauge : 23 - 26 AWG

Electrical

Electrical Insulation Resistance: SOOMO min. @100V
d.c Dielectric Withstanding Voltage : 1000V D.C or A.C
Peak, Contact to Contact; 1500V D.C or A.C Peak,
Contact to Shield @ 60Hz for 1 Minute.

Physical

Housing : Zinc-alloy fully shielded
Contact pin : Phosphor Bronze Alloy Plated With 50
micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100%
Sn Alloy

Item	Part name	MATERIAL	Q'TY
1	HOUSING Moudle	Zinc-alloy	1
2	COVER	Zinc-alloy	1
3	GROUNDING	SUS304 CSP-1/2H	1
4	PCB Moudle	-	1
5	Nut	NYLON 94V-0	1
6	Wiring Lable-UP	Lable	1
7	Wiring Lable-DOWN	Lable	1