

LAN-SWITCH

SFP Mini fiber converter 10/100/1000 MBPS SM + MM



Anvendelse

SFP Mini fiber converter er den ultrakompakte plug-and-play 10/100/1000Base-T til 1000Base-X mediekonverter som er designet til applikationer, hvor kompakt størrelse, lav vægt og lav effekt er kritiske krav.

Den kan nemt installeres på trange steder eller nemt lægges ned i lommen eller i en bærbar taske med sin ultrakompakte størrelse (79*23*18mm) og ultralette vægt (57 g).

Denne ultrakompakte mediekonverter kan drives af USB 1.0- eller 2.0-port, hvor en ekstra stikkontakt muligvis ikke er tilgængelig.

Når den er tilsluttet en computerens USB-port, lukker mediekonverteren automatisk ned, når du slukker for computeren, hvilket sparer energi.

Denne ultrakompakte mediekonverter er en ideel løsning for en bærbare computer, hvor der er brug for en Gigabit-forbindelse og hvor lokal strøm er ikke tilgængelig.

Der medfølger en 5V AC/DC strømadapter

Specifikation

Data hastighed: 10/100/1000 Mbps

Interface: SFP

Medie: Singlemode + Multimode

Strøm: 5V AC/DC ekstern strømforsyning

Drifts temperatur: -20°C~70°C

Størrelse: 79x23x18mm

Vægt: 57 gram

Pakning: 1 stk.



Varenr.: 227595

EANnr.: 5706683028359

LAN SWITCH

SFP Mini fiber converter 10/100/1000 MBPS SM + MM

- Ultra-compact size (79x23x18mm) and ultra-light weight (57g)
- 10/100/1000Base-T to 1000Base-X
- SFP slot for flexible long-distance transmission
- USB powered for easy portability or used with the included power adaptor
- Auto-negotiation
- Auto-MDI/MDIX
- Plug-and-Play
- Lower jitter
- Lower latency
- Ultra low power dissipation <math>< 1,2W</math>
- Support Jumbo frame 10Kbytes
- Support watchdog, automatically reboot if frozen
- Operation temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

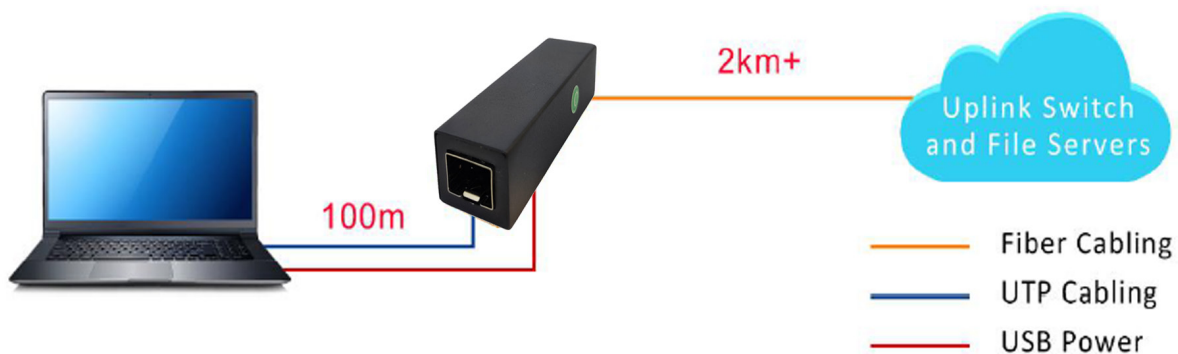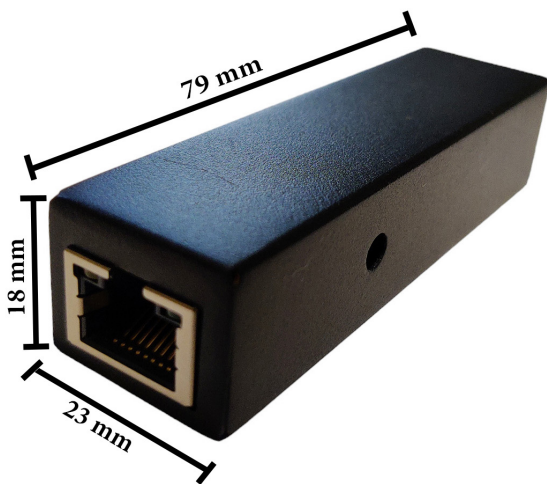

LAN-SWITCH

SFP Mini fiber converter 10/100/1000 MBPS SM + MM

Port Interface	
Fixed port	1*1000 Base-X SFP, 1*10/100/1000 Base - T
Power interface	DC jack
LED Indicators	
Green LED	link/act indicator
Yellow LED	1000M link indicator
Cable-type &Transmission Distance	
Twisted-pair	0-100m (CAT5e,CAT6)
SFP slot	Depending on the SFP module
Electrical & Layer 2 Specifications	
Input voltage	DC 5V
Total Power consumption	Full load≤1.2W
MDX/MIDX	Support
Jumbo Frame	Support 10Kbytes
Watchdog	Support
Environment	
Operating temperature	-20°C~70°C
Storage temperature	-40°C~85°C
Relative humidity	5%~95% (non-condensing)
Thermal methods	Fan-less, natural cooling
MTBF	100,000 hours
Protection & Certification	
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (2KV) (10/700us)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m
Certification	CE/FCC/RoHS
Mechanical Dimensions	
Product size	79*23*18mm
Installation Method	desktop
Weight	57 g