

# LANRACK

19" IP55 vægskab 12HE H553xB600xD600 mm  
GD grå



## Anvendelse

Anvendes til indendørs installationer for data, fiber og tele.  
Rackets IP55 konstruktion gør det meget  
velegnet til industriel og støvet brug.  
Filtre ved ventilationen sikrer mod støvindtrængning.  
Gummipakning og 3-punkt lukning opretholder  
IP klassificeringen af døren.  
Der medfølger PG forskruninger for kabelindgange.  
Konstruktionen i 1,5mm tykt gods og epoxy/polyester pulver  
lakering, gør racket meget robust og sikrer lang levetid.

Varenr.: 242830  
EANnr.: 5706683027024

## Specifikation

Materiale: Galvaniseret stål  
Tykkelse: 1,5 mm  
Farve: Lys grå RAL 7035  
IP: IP55  
19" opspænding  
HE: 12  
Bredde: 600 mm  
Dybde: 600 mm  
Max belastningw: 100 kg  
Pakning: 1 stk.

Tilkøb:  
Fantray 2xfan + termostat  
og 1,5m ledning  
Farve: grå  
Varenr.: 252359

# LANRACK

## 19" IP55 vægskab 12HE H553xB600xD600 mm GD grå

### W=600 mm SAFEbox IP55 Indoor Cabinets Enclosure

SAFEbox IP55 Indoor Cabinets are designed for industrial applications.

Based on EN60529 provided IP55 protection class against dust and water ingress. Where the enclosure provides IP55 protection against dust and water, with fan and filter integration performs IP54.

Application areas are semi-open areas like factories, warehouses, lean-to roof conditions, where no direct rain and environmental effects.

Totally gasketed doors, IP55 performing swing handle locking with 3 point locking system, isolated cable entries provides best performance for water and dust ingress.

t=1,5 mm thickness material monoblock welded construction, with epoxy polyester type powder coating which is RAL 7035 Light Grey color, provides the corrosion resistance.

Ventilation via filtered inlets and exhaust of hot air is provided as standard for passive ventilation, options to include fans for active ventilation.



# LANRACK

## 19" IP55 vægskab 12HE H553xB600xD600 mm GD grå

### Construction details:

Keyed swing lock handle with 3 point locking system provides security and anti-vandal structure, also maintaining the IP55 protection.

Integrated fan filter housings creates fresh air inlet, performing IP54 protection of water and dust ingress.

Roof canopy provides IP54 protection once 1 or 2 fan module integrated on the ABS grill housing. Filtered openings provides efficient hot air removal from enclosure.

Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even cold/hot weather conditions.

IP55 conforming cable entry points, multiple access with 2xPG21, 1xPG48 integrated cable entry pats, 2 pcs 28 mm diameter PVC blind cap. Which as an option can be replaced with PG21 cable entry pats. After insertion of the cables to the enclosure, it is recommended to close the openings with foam or insulation material. In addition all Safebox cabinets are delivered with a plain metal cable entry panel which means if shipping configuration cable entry pats are not suitable for your project punching can be done on the spare cable entry plain panel.

The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.

The front door has strengthening bars welded inside the front door, 2 pcs U shaped.

19" rails of Lande SAFEbox IP55 Indoor Cabinets has automated silk-screen U numbering, from top to bottom or bottom to top. To save time when installing equipment. 19" rails are 4 fold bending for strength 1,5 mm thickness provides the high load capacities. The 19" rails are made of steel with 8-12 micron zinc plating for corrosion resistance. 19" rails are adjustable in depth. Cabinets are delivered with 1set: 2pcs 19" front rails.


The front door infused sealing gasket sits on the flange bends of main cabinet construction maintaining the IP rating.

Included 4 pcs, t. 3,0 mm thickness wall fixing brackets with proper washer and screws.




# LANRACK

19" IP55 vægskab 12HE H553xB600xD600 mm GD grå

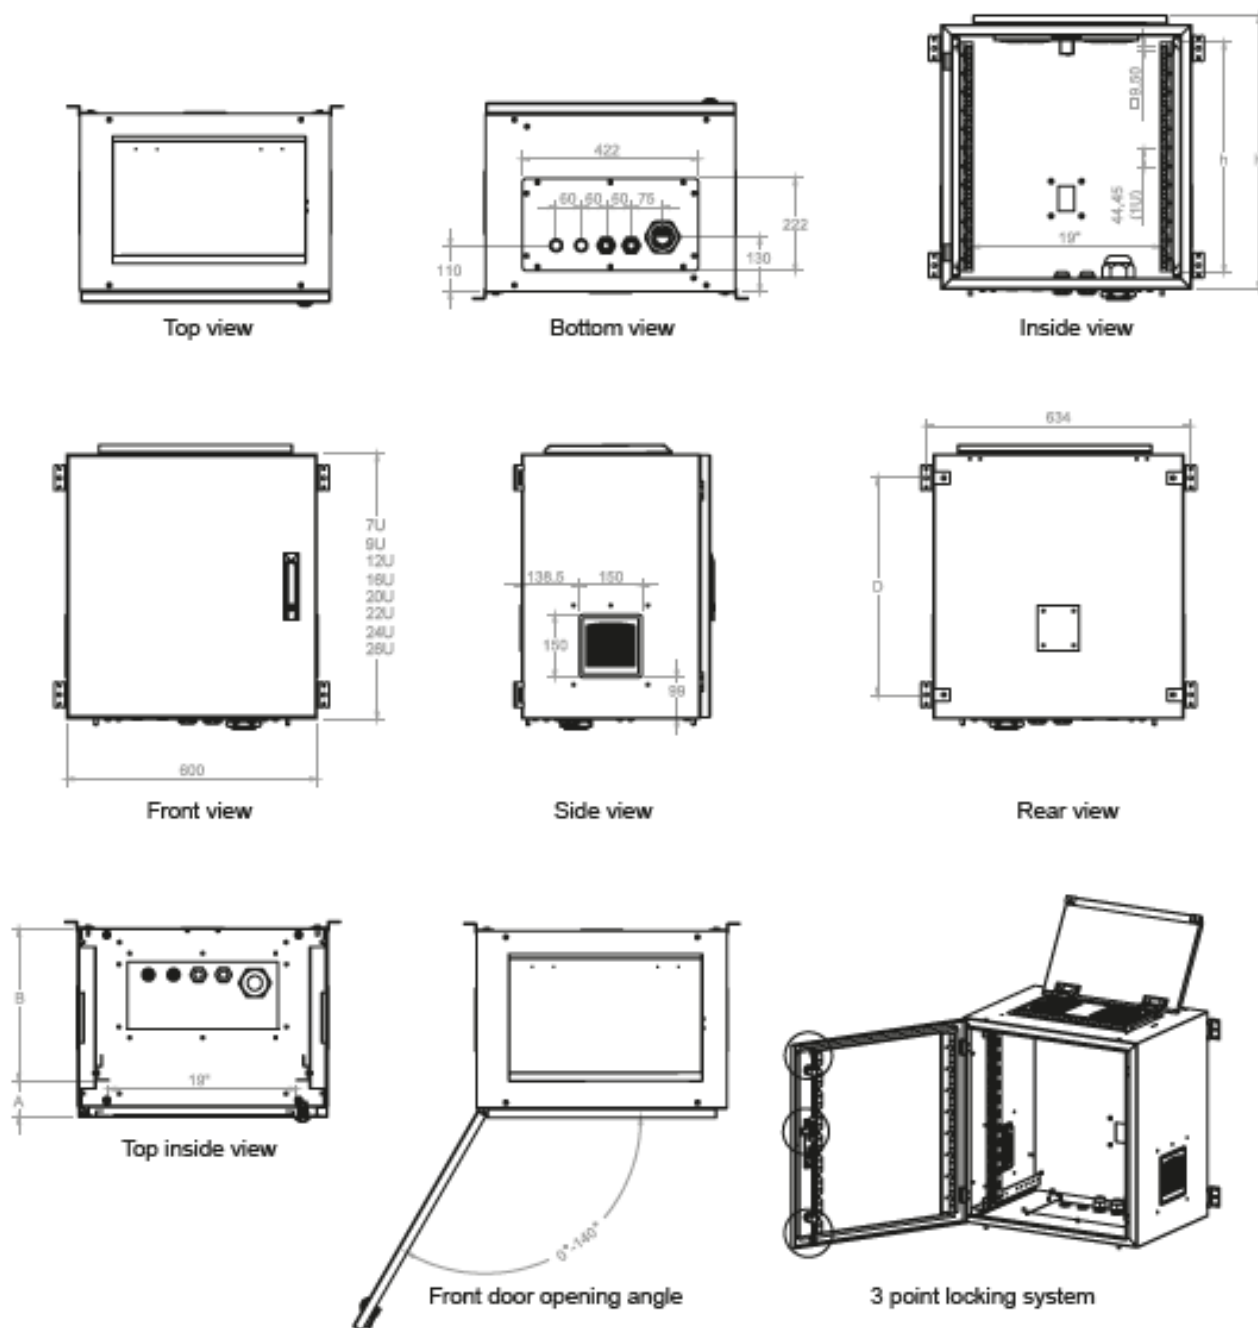

# LAN-RACK

19" IP55 vægskab 12HE H553xB600xD600 mm GD grå

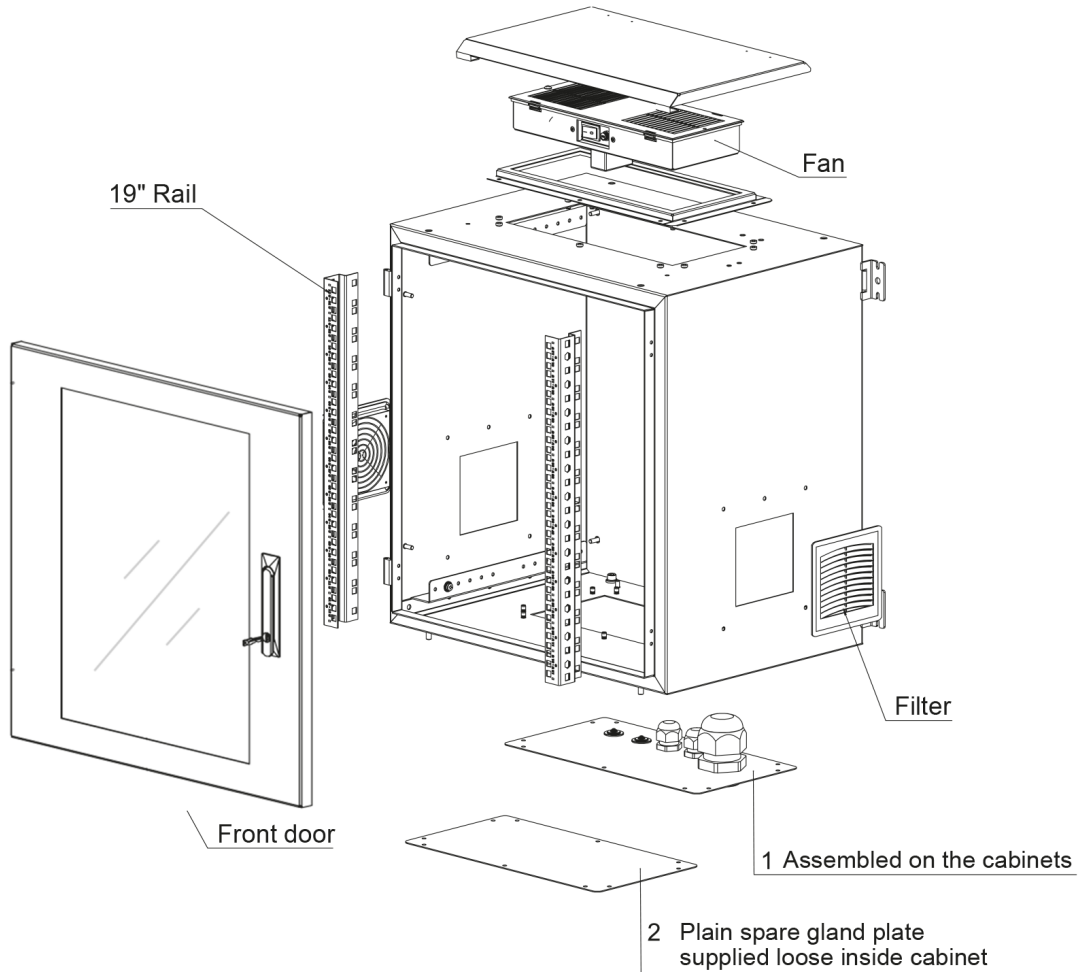

## 19 " SAFEbox Series IP55 Indoor Cabinet Enclosure W=600mm D=600mm

Product Number*	Product Description	Size WxDxH mm	h Size in U	h in mm	H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm
242830	12U 19" SafeBox IP55 indoor cabinet enclosure W=600 mm D=600 mm	600x600x663	12U	533	663	600	19"	600	495	1	630x630x690