


Fan Module for inorax-AL Series

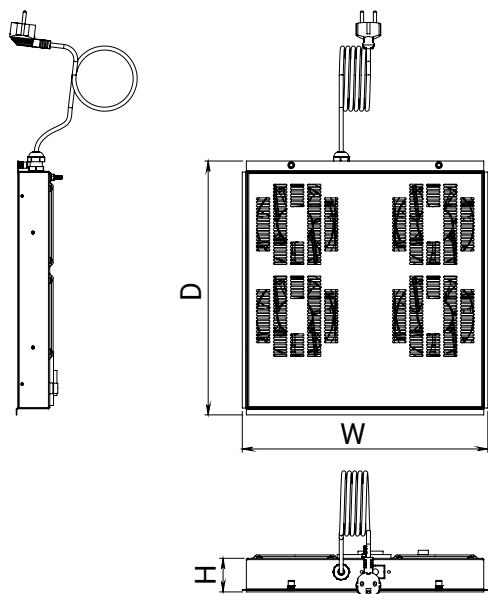


Operating Voltage AC 220 / 240 Volts 50/60 Hz	
Standards Conforms to IEC 297-1	Air Flow 85 / 97 CFM
Noise 42,2 / 44,5 dB (A)	Material 1,5 mm Steel
Fan Speed 2600 / 2900 rpm	Finish Electrostatic Powder Paint
Packaging One piece in a box	

H (mm)	D (mm)	W (mm)	Number of Fans	Weight kg	Part No **, **
47	375	363	2	3,76	CPA-X-2001
47	375	363	4	4,81	CPA-X-2002
47	510	363	6	6,74	CPA-X-2003

- 2-4 Fan trays can only be used in 600-800 mm depth cabinets, not for 1000 mm and bigger depth cabinets.
- 6 Fan tray can only be used in 1000 mm and bigger depth cabinets, not for 600-800 mm depth cabinets

Fan Module for inorax-ST series

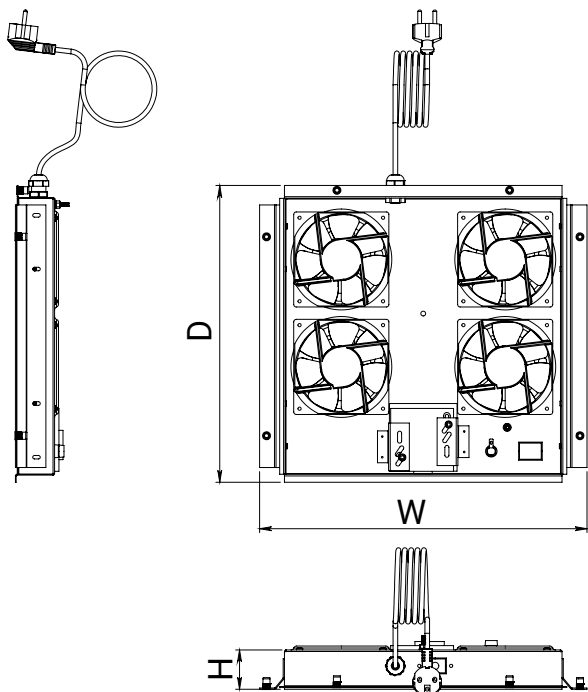

Operating Voltage AC 220 / 240 Volts 50/60 Hz	
Standards Conforms to IEC 297-1	Air Flow 85 / 97 CFM
Noise 42,2 / 44,5 dB (A)	Material 1,5 mm Steel
Fan Speed 2600 / 2900 rpm	Finish Electrostatic Powder Paint
Packaging One piece in a box	

H (mm)	D (mm)	W (mm)	Number of Fans	Weight kg	Part No
47	375	363	2	2,90	CSA-X-2001
47	375	363	4	3,95	CSA-X-2002

* X : Color code = 7: RAL 7035 (Grey); 9: RAL 9005 (Black)