

LANRACK

19" Rack 42HE H2033xB800xD800 GD sort IP54
LRG-2000, indendørs



Anvendelse

19" gulvrack for data og server installationer, hvor støv- og vandbeskyttelse er påkrævet.

Lodrette 19" monteringskinner kan justeres frit gennem dybden, hvilket forenkler montering af enhver enhed og konfiguration af tilslutningskabler.

Frontdør i hærdet glas med flerpunktslås til svinghåndtag

Massiv bagdør med svinghåndtag flerpunktslås.

Særlig polyurethan pakning på døre og paneler for at sikre IP -beskyttelse.

Mulighed for at udskifte støvfilter

Specifikation

Materiale: Anodiseret aluminium ekstruderingsprofil og 1,2 til 2 mm stål.

Farve: Lysgrå/sort, RAL 7035 og RAL 9005

Dør: Front; Glasdør
Bag; Pladedør

Lås: Flerpinktlås til svinghåndtag

IP: 54

Pakning: Polyurethan

Filter: Skiftbar

Compliance: RoHS, UL Certified

Størrelse: H2033xB800xD800mm

HE: 42HE

Belastning: 2000 kg (max)

Jording: Plint

Tilbehørs program: Stort

Leveres: Usamlet / Samlet

Fødder: 4 stk. justerbar

Varenr.: 248190

19" Rack 42HE H2033xB800xD800 GD sort IP54 LRG-2000, indendørs



IP 54 inorax-AL Rack Cabinet

IP 54 Inorax-AL rack cabinet system offers the best solution for IT and Telecom applications in harsh environmental conditions where dust and water protection is required. A wide range of cable management accessories is available to ensure perfect management of copper & fiber cables and 19" equipment. Vertical 19" mounting rails can be adjusted freely through the depth, which simplifies mounting of any device and configuration of connecting cables.

Technical Features


Material	Frame; Anodized Aluminium extrusion profiles Other parts: 1,2 and 2 mm steel
Color	RAL 7035 or RAL 9005
Compliance	RoHS, UL Certified
Packaging	Assembled or unassembled
Maximum Static Load	Up to 2000 kg.
Finish	Doors, side panels, top covers: Electrostatic Powder Paint 19" mounting rails: Zinc-plated

Standard Configuration:

- Extruded Aluminium frame chassis up to 2000 kg
- IP Protection :IP54
- Tempered glass front door with swing handle multi-point lock
- Solid rear door with swing handle multi-point lock
- Special polyurethane gasketing on doors and panels to ensure IP protection
- Solid removable side panels
- Bottom sheet with adjustable IP protected cable entry
- 2 pairs of depth adjustable heavy duty 19" mounting rails
- 2 pairs of adjustable feet
- Color RAL7035 or RAL 9005
- RoHS compliant, UL certified



Polyurethane gasketing for IP protection

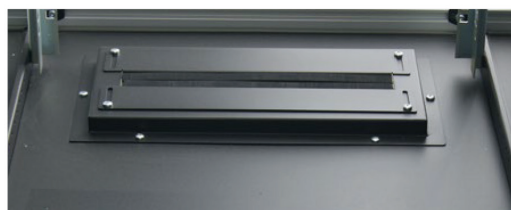

IP protected cable entry

Height U	Outer width (W) mm	Outer depth (D) mm	Outer height (H) mm	Inner width (w1) mm	Inner depth (d1) mm	Inner height (h1) mm	19" Rails adjustable depth range (c)	Weight kg
42U	800	800	2033	703	750	1898	129-629	114