


POWER-LAN

Strømpanel PDU 18xC13+3XC19 + IEC60309
stik 16A sort 2,5m ledning

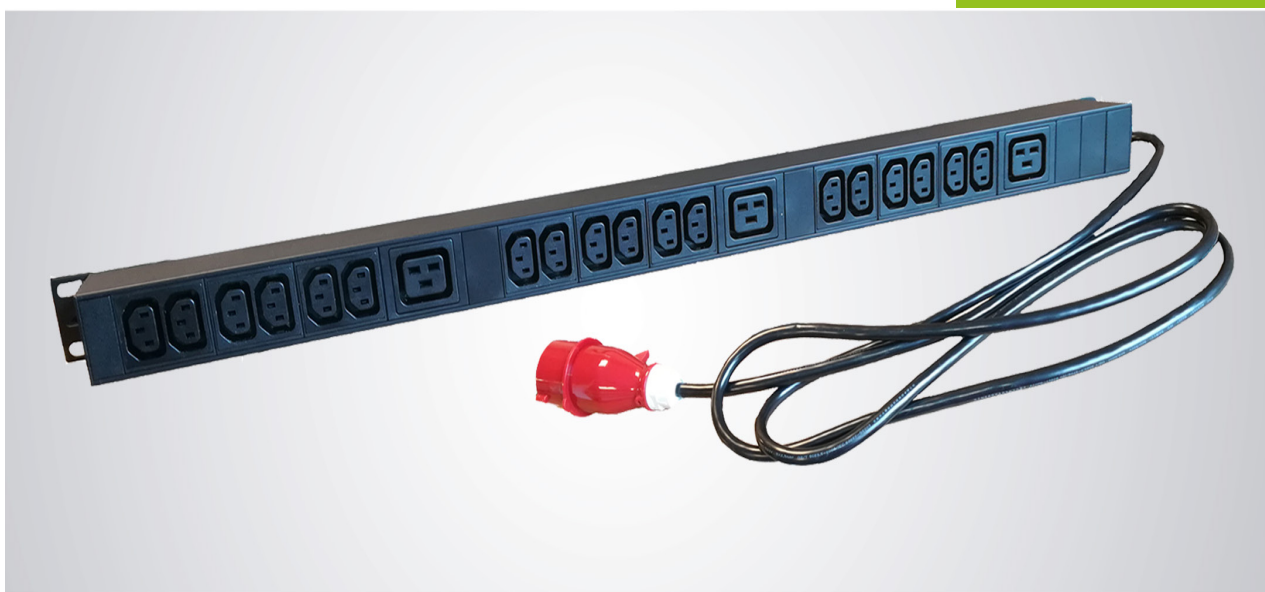

Anvendelse

For vertical montage. Panelet består af 18 stk. C13 + 3xC19 samt 2,50 mtr. kabel med IEC60309 stik.

Varenr.: 261878
EANnr.: 5706683026942

Specifikation

Højde: 1HE

Længde: 840mm

Dybde: 68mm

Antal udtag: 18 stk C13 + 3 x C19

Kabel: 2,5m

Stik: IEC60309 stik (16A 3P+N+J)

Material udtag: Plast

Materiale hus: Metal

Farve: Sort

Max power: 3x4000W


Strømpanel PDU 18xC13+3XC19 + ICE60309 16A sort 2,5m ledning

PDU Technology Specification

	Lan-com	RoHS	Yes
Product Name	Designated Power Distribution Unit for Cabinet		
Part Number	261878		
No.	Item	Detailed Description	
1	Product Series	AUE2212	
2	Socket Type	IEC320 C19 Socket(Single 2)[3];Double IEC320 C13 Socket[9];	
3	Socket Quantity	21	
4	Power Input	Left end single input	
5	Bracket Install	Inverse installation	
6	Cable with plug	IEC60309 plug (16A 3P+N+E)	
7	Control Function	No controlling function	
8	Protection Function	No protecting function	
9	Case	Black	
10	Cable Specification	5 x 2.5 mm ² x 3M	
11	Product Size	L x W x H = 800 x 44.4 x 60 mm	
12	Mounting Length	778 mm	
13	Case Length	747 mm	
14	PDU Exponent	1. 202	
15	Fittings	2pcs φ6×16mm cross bolt, 2pcs M6 float nut	
16	Product Label	Product Name	Designated Power Distribution Unit for Cabinet
		Specification Model	261878
		Rating voltage	400VAC 50/60Hz
		Rating Current	3x 16A
		Max. Current	
		Max. Power	3x 4000W
		Safety Authentication	CE
		Logo	RoHS
No.	Add-In		
1	Socket assemble		
2	Interior Connection Wire	1.5 mm ² (16AWG)	
3	Interior Connection Style	Group connection	
4	Fix the Cable	Cable clamp(16)	
5	Module Assemble (from left to right)	Pls refer to following drawing	

Strømpanel PDU 18xC13+3XC19 + ICE60309 16A sort 2,5m ledning

PDU Technology Specification

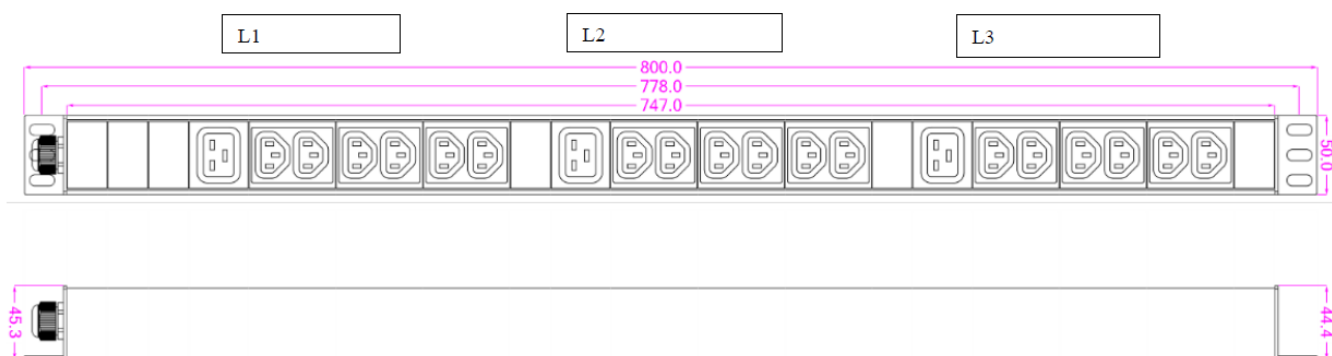

DIMENSION AND TOLERANCES (Unit: mm)			
Length:	845	Mounting length:	818.5
Width:	68	Case length:	792
Height:	44.4	case tolerance:	± 1.0



IEC60309 plug (16A 3P +N+E)