


Product Data Sheet

Publication Date: 01.06.2023

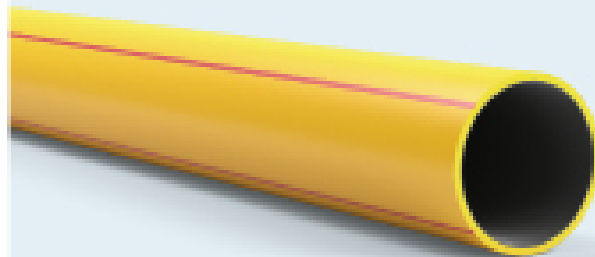

Issuer's Name and Address

EMM. KOUVIDIS S.A.

Manufacturer of plastic piping systems

71500, VIO.PA., Tylissos, Heraklion, Crete, Greece

T: +30 2810831500 | info@kouvidis.gr | www.kouvidis.gr

Product type

Light type, halogen free, three layer rigid conduit made of polypropylene, with color marking, outer nominal diameter (DN/OD) and resistance to compression $\geq 320\text{Nt}$ (according to EN 61386-21)

Product name

SUPERSOL PLUS MS

Conduit for cable management and protection, halogen free

Class: 23431

Properties

Raw material	Polypropylene (PP)
Color	RAL 1023 yellow (outer layer), RAL 9004 black (inner layer) RAL 3020 red (longitudinal lines), RAL 6037 green(longitudinal lines)
Nominal diameter: Outer (DN/OD)	Ø (mm): 16.0, 20.0, 25.0, 32.0
Nominal diameter: Inner (DN/ID)	Ø (mm): 13.4, 17.5, 22.1, 28.4
Resistance to compression	$\geq 320\text{Nt}$
Resistance to impact	2J
Lower temperature range	-25°C
Upper temperature range	+105°C
Electrical insulated characteristics	Yes
Protection against ingress of solid objects and water	min IP65
Resistance to corrosion	Not applicable
Tensile strength	Non declared
Resistance to flame propagating	Non flame propagating
Suspended load capacity	Non declared
Anti-electromagnetic technology	Absorbs part of the electromagnetic radiation emitted by the cables
Halogen free	Yes
Lower frictions	Special ultra-slip material is added in the internal layer
Antistatic Technology	Protection against static electricity
European Directives	2014/35/EE (LVD), 2011/65/EE (RoHS)
Assembled with	Coupler SUPERSOL PLUS
Packaging	57m (Ø16), 57m (Ø20), 30m (Ø25), 30m (Ø32)
Part number	Red lines: 10170XX/ Green lines: 10180XX <small>where XX: 16,20,25,32</small>