
LAN-SECURE

BRANDSIKKERT KABEL PT 4X2X0,6 MM LSZH RØD

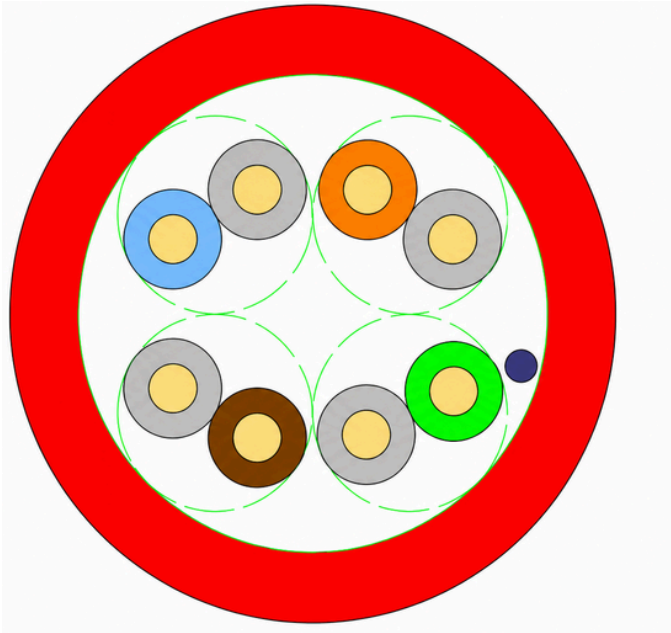

ANVENDELSE

Brandsikkert kabel LAN-SECURE PT er et halogenfrit, flammehæmmende og brandbestandigt signalkabel, der anvendes i brandalarmanlæg, hvor der stilles krav om funktion både under og efter brand.

Reference Standard: EN 50200:2015
& IEC 60332-3 & IEC 60754 & IEC 61034
Part No.: SPEC-D-154


- **Varenr.: 124815**
- **EANnr.: 5706683039027**

SPECIFIKATION

- Antal par: 4
- Leder: 0,60 mm kobber
- Isolering: Keramisk silikonegummi
- Kappe: LSZH
- Udvendig diameter Ø: 8,30 mm
- Farve: Rød
- Oplægning: Tromle 500 m
- CPR: Dca

REKVIRER DEKLARATION

BRANDSIKKERT KABEL PT 4X2X0,6 MM LSZH RØD

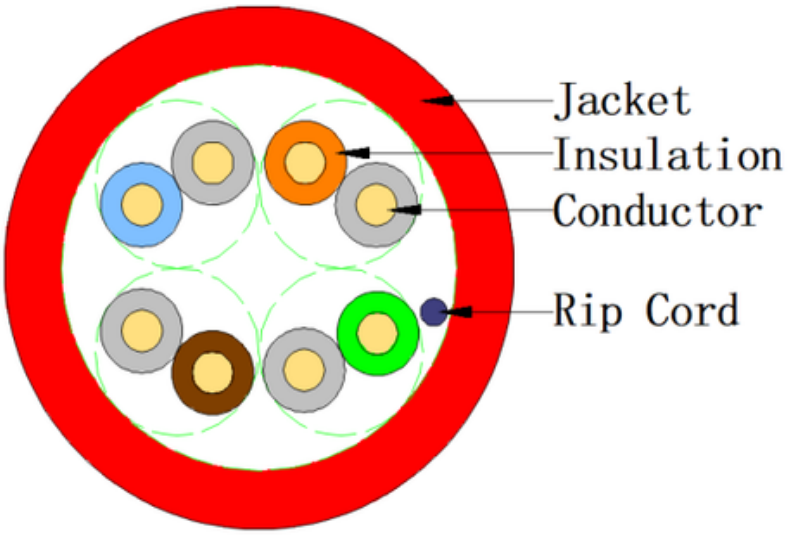

Performance	
Max. Conductor DC Resistance @20°C (ohms/km)	65.0
Circuit Integrity to EN 50200 & Annex E	PH 90
Minimum Bend Radius	8 x OD
Operating temperature range	-25 to 70°C
Rated Voltage (DC)	100 V
Reference Standard	
EN 50200:2015 & IEC 60332-3 & IEC 60754 & IEC 61034	

BRANDSIKKERT KABEL PT 4X2X0,6 MM LSZH RØD

Construction	
Conductor	Solid Bare Copper
Conductor Dia Nom. (±0.008 mm)	0.6
Insulation	Ceramifiable Silicon Rubber
Average Thickness - Insulation (mm)	0.50
Insulation Dia Nom. (±0.05 mm)	1.60
Twisted	2C
Cabling	4P
Jacket	LSZH
Average Thickness - Jacket (mm)	0.80
Min. Point Thickness - Jacket (mm)	0.70
Outer Dia Nom. (±0.5 mm)	8.30
Rip Cord	Yes
Insulation Color Code	
1	Grey / Blue
2	Grey / Orange
3	Grey / Green
4	Grey / Brown
Jacket color	Red (RAL3000)