LC/UPC - LC/UPC OM4 10,0 M GRADE B



ANVENDELSE

Anvendes primært i datacentre med stor porttæthed og hvor kravene til performance er store.

- **Varenr.: 233025**
- **EANnr.: 5706683029836**


SPECIFIKATION

- Interface: LC/UPC - LC/UPC
- Længde: 10,0 m
- Standard: OM4 multimode
- Fiberstørrelse: 50 / 125 my
- Typo: Duplex med pulling tap
- Max dB: 0,20
- Kappestørrelse: 2,0 mm
- Farve: Lilla
- Fabrikat: LAN-OPTIC
- Pakning 1 stk.

REKVIRER DEKLARATION

Name	Patch Cord	Specification	LCAPC(Uniboot)-LCAPC(Uniboot)-SM-2C-LM	File NO.	SD-P04273	Version	REV.01


Description: LCAPC to LCAPC with Uniboot, Multimode OM4 2 Cores patch cord.

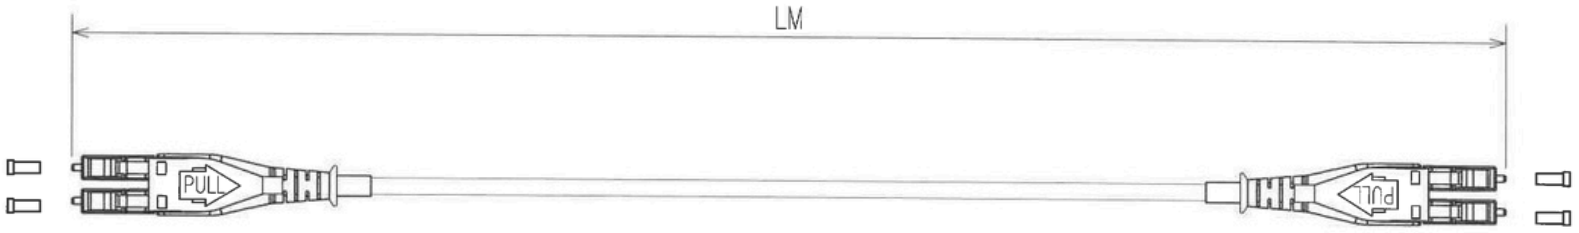

LCAPC Connector,Green

LCAPC Connector,Green

Channel informatior
A-----B
B-----A

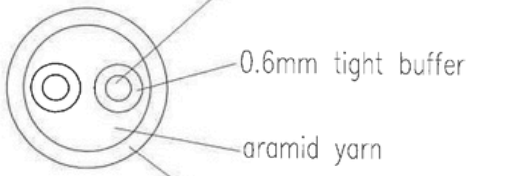

Note:
1.Fiber cable according to IEC 60793-2;
2.End surface test is according to IEC 61300-3-35;
3.Test standard:IL≤0.2dB;RL≥60dB
4.ROHS Compliant.

LENGTH(L)	TOLERANCE
L≤1M	+50mm/0
1M<L≤3M	+100mm/0
3M<L≤10M	±100mm
10M<L≤30M	±150mm
L>30M	±200mm

Drawn by: Yinghao Gao Checked by: Guojun Shen Approved by: Guojun Shen Page NO.:1/1

LANCOM • Hassellunden 7 • 2765 Smørum • Telefon 4457 0787

LANOPTIC