

# LAN-RACK

19" rack 22HE H1200xB600xD600mm  
GD sort LRG-300



## Anvendelse

19" Gulvrack for data installatoner. Leveres med 19" opspænding for og bag. 19": Electrosteel (ledende). Aflåselige sideplader. Aftagelig for og bagdør, som kan højre/venstre vendes. Forberedt for ventilation. Topplade med 3 kabelindgange. Bundplade med gæller og kabelindgang for og bag. Leveres med hjul og nivelev fødder.

## Specifikation

**Materiale:** Pulverlakeret stål, 1,5 mm

**Farve:** Sort

**Dør:** Glasdør

**Lås:** 1 punkt vridergreb Eurolock  
Forberedt for: Ruko

**Opspænding:** 19" for og bag. Electro-  
steel (ledende)

**Størrelse:** H1200XB600XD600 mm

**HE:** 18HE

**Max belastning:** 300 kg

**Jording:** Forberedt for jord (kobber-  
stag)

**Tilbehørs program:** Stort


**Leveres samlet**

**Hjul:** 4 stk. nylon

**Fødder:** 4 stk. nivelevbar


Vare-nr.: 243003  
EANnr.: 5706683021022

## 19" rack 22HE H1200xB600xD600mm GD sort LRG-300

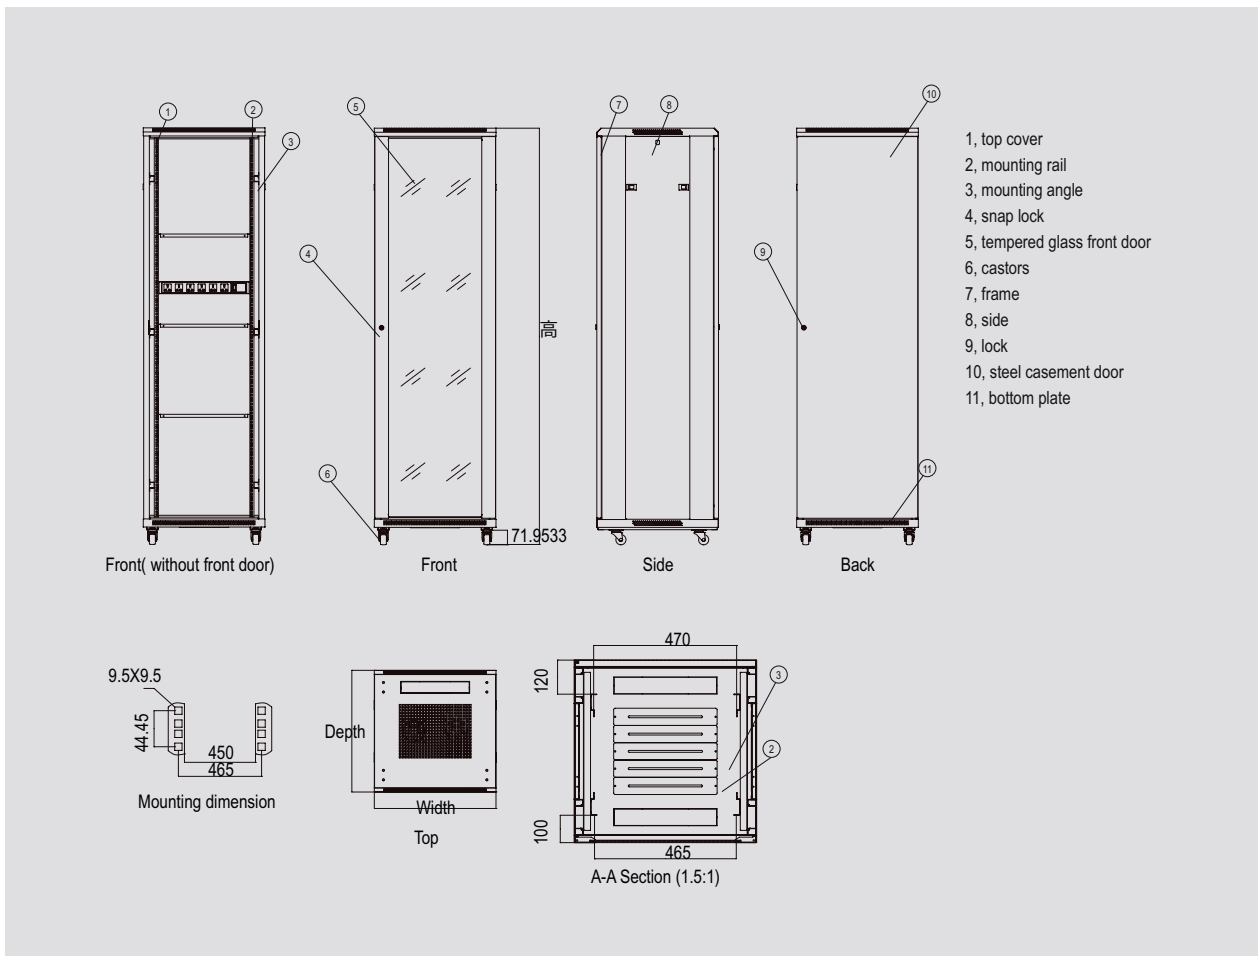

S/N	Specification	Qty	Unit	Material	Surface Finish	Remark
1	Top cover	1	Pcs	0.8mm cold rolled steel	Powder coated	-
2	Rack	2	Pcs	0.8mm cold rolled steel	Powder coated	-
3	Front door	1	Pcs	0.8mm cold rolled steel	Powder coated	B type door
4	Side panel	2	Pcs	0.8mm cold rolled steel	Powder coated	With lock
5	Rear door	1	Pcs	0.8mm cold rolled steel	Powder coated	A type door
6	Lock	4	Pcs	-	-	-
7	Mounting rail	4	Pcs	1.2mm cold rolled steel	Powder coated	-
8	Mounting angle	6	Pcs	0.8mm cold rolled steel	Powder coated	-
9	Bottom plate	1	Pcs	0.8mm cold rolled steel	Powder coated	-
10	Fixed shelf	2	Pcs	1.2mm cold rolled steel	Powder coated	1pcs under 37u
11	Castors	4	Pcs	-	-	-
12	Feet	4	Pcs	-	-	-
13	Cage and nuts	40	sets	-	-	20pcs under 32u
14	Fan	4	Pcs	-	-	-
15	6way power strip	1	Pcs	-	-	-
16	Wrench	1	Pcs	-	-	-

## 19" rack 22HE H1200xB600xD600mm GD sort LRG-300

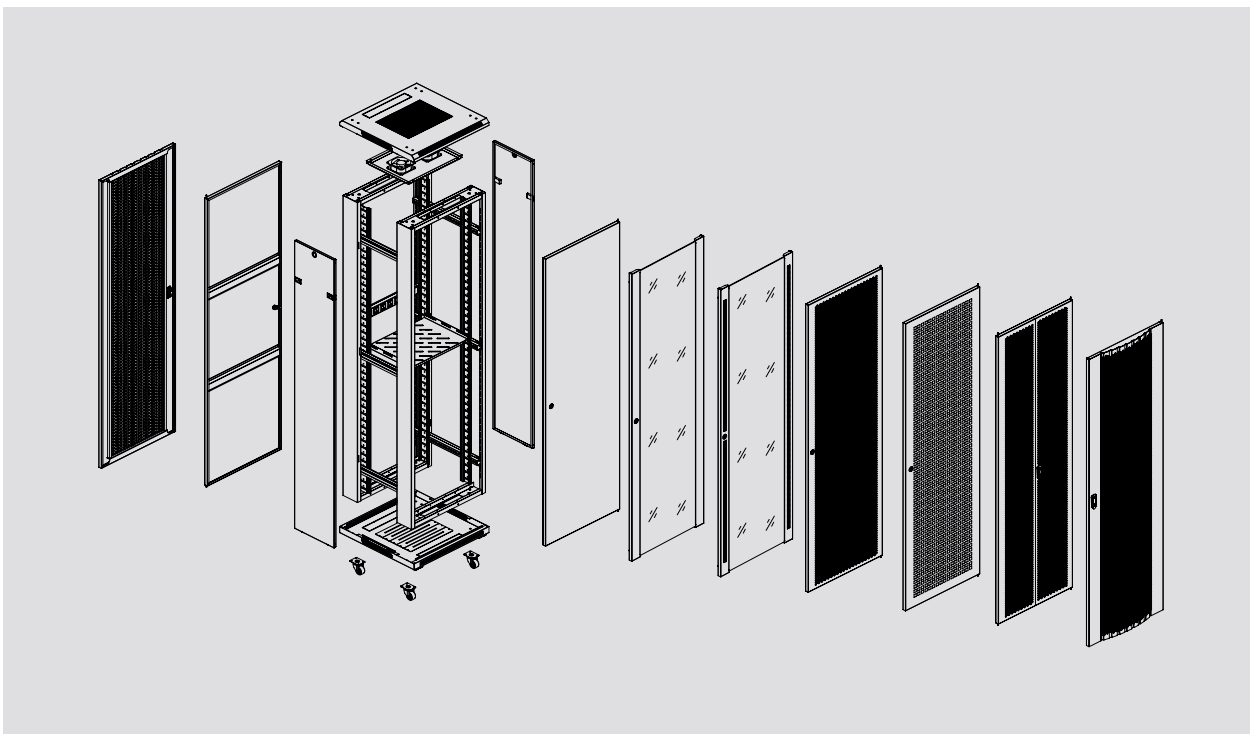

### Standard

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard. Compatible with metric ETSI and 19 inch international standard.

### Features

- Exquisite design with precise craftsmanship.
- Adjustable and heavy duty castors are available at the same time. Static loading:300KG
- The top and bottom wiring channel can be closed and adjusted.
- Vented front door and rear door enable ventilation and reliable operation. Rack's side panel can be easily assembled.
- Surface finish: degreasing, pickling, phosphoric, powder coating.
- Height, width, and depth selectable, full range of optional accessories.

### Materials

Cold-rolled steel sheet. Thickness for frame 0.8mm, mounting rail 1.2mm, smoky grey glass 5mm.

### Application

Widely used in network system, educational system, broadcasting system and telecommunication system. Suit for placing server computer and precision electronic equipments.