

LAN-RACK

19" rack 42HE H2080xB600xD600mm
PPD sort LRG-300



Anvendelse

19" Gulvrack for data installatoner. Leveres med 19" opspænding for og bag. 19": Electrosteel (ledende). Aflåselige sideplader. Aftagelig for og bagdør, som kan højre/venstre vendes. Forberedt for ventilation. Topplade med 3 kabelindgange. Bundplade med gæller og kabelindgang for og bag. Leveres med hjul og nivelev foddere.

Specifikation

Materiale: Pulverlakeret stål, 1,5 mm

Farve: Sort

Dør: Perforeret pladedør

Lås: 1 punkt vridergreb Eurolock
Forberedt for: Ruko

Opspænding: 19" for og bag.
Electrosteel (ledende)

Størrelse: H2080xB600xD600 mm

HE: 42HE

Max belastning: 300 kg

Jording: Forberedt for jord
(kobberstag)


Tilbehørs program: Stort

Leveres samlet

Hjul: 4 stk. nylon


Fødder: 4 stk. nivelevbare

19" rack 42HE H2080xB600xD600mm PPD sort LRG-300

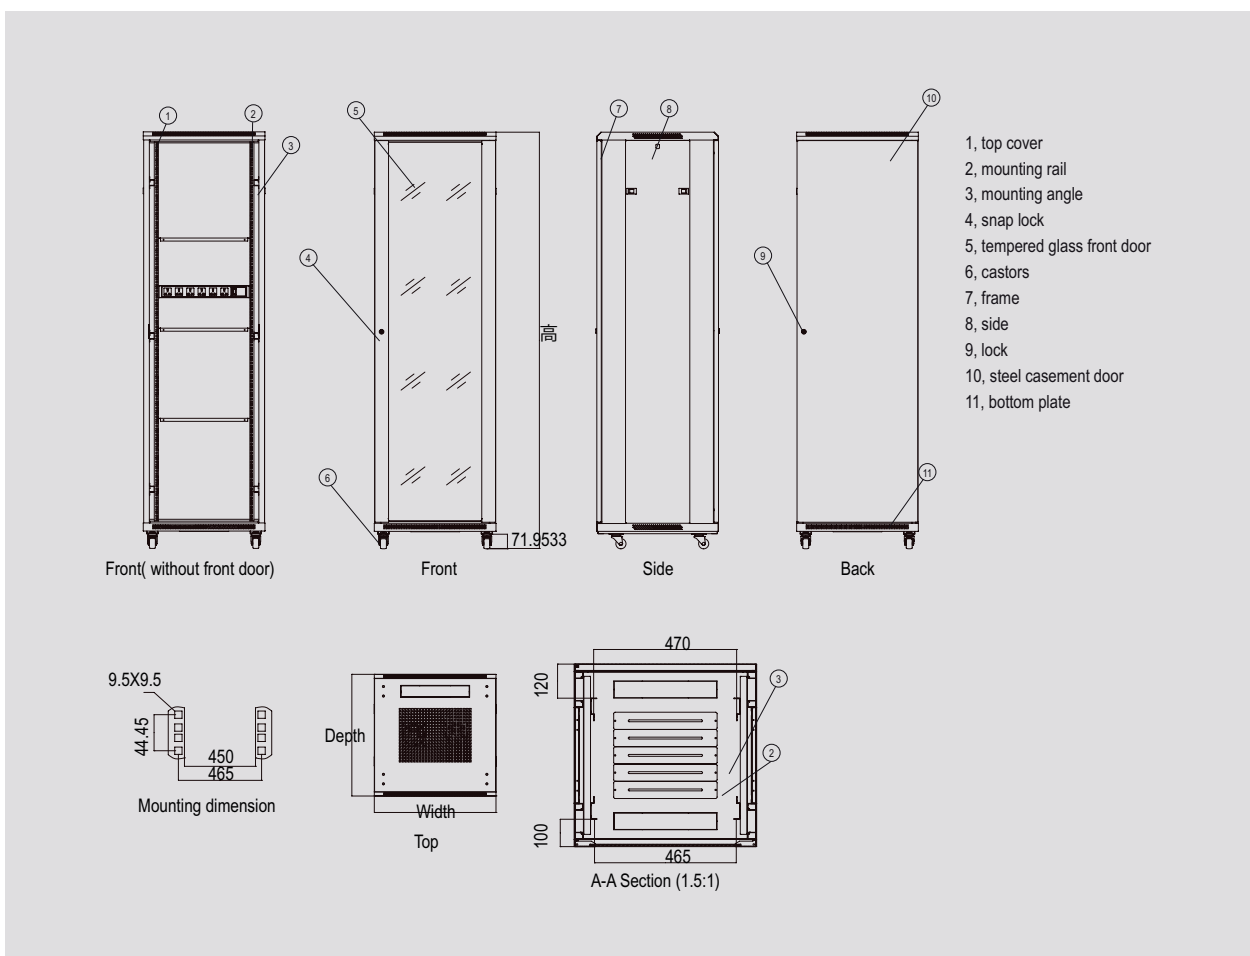

S/N	Specification	Qty	Unit	Material	Surface Finish	Remark
1	Top cover	1	Pcs	0.8mm cold rolled steel	Powder coated	-
2	Rack	2	Pcs	0.8mm cold rolled steel	Powder coated	-
3	Front door	1	Pcs	0.8mm cold rolled steel	Powder coated	B type door
4	Side panel	2	Pcs	0.8mm cold rolled steel	Powder coated	With lock
5	Rear door	1	Pcs	0.8mm cold rolled steel	Powder coated	A type door
6	Lock	4	Pcs	-	-	-
7	Mounting rail	4	Pcs	1.2mm cold rolled steel	Powder coated	-
8	Mounting angle	6	Pcs	0.8mm cold rolled steel	Powder coated	-
9	Bottom plate	1	Pcs	0.8mm cold rolled steel	Powder coated	-
10	Fixed shelf	2	Pcs	1.2mm cold rolled steel	Powder coated	1pcs under 37u
11	Castors	4	Pcs	-	-	-
12	Feet	4	Pcs	-	-	-
13	Cage and nuts	40	sets	-	-	20pcs under 32u
14	Fan	4	Pcs	-	-	-
15	6way power strip	1	Pcs	-	-	-
16	Wrench	1	Pcs	-	-	-

19" rack 42HE H2080xB600xD600mm PPD sort LRG-300

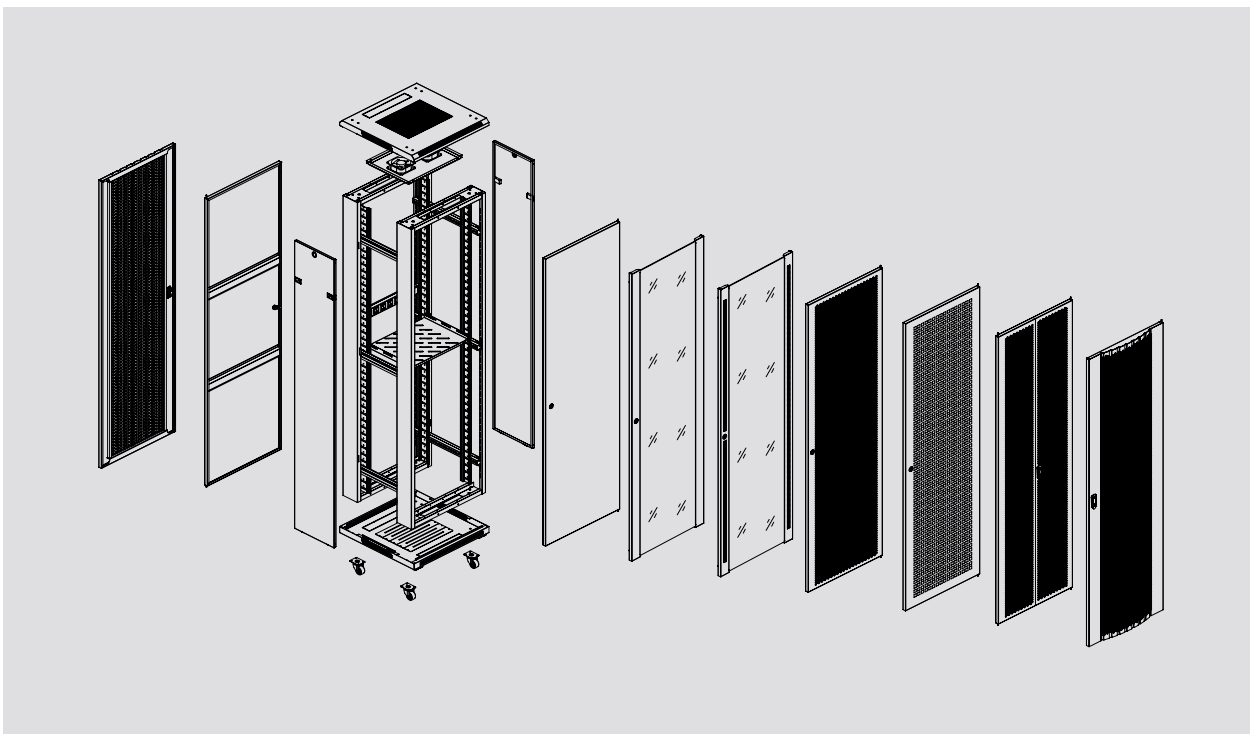

Standard

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard. Compatible with metric ETSI and 19 inch international standard.

Features

- Exquisite design with precise craftsmanship.
- Adjustable and heavy duty castors are available at the same time. Static loading:300KG
- The top and bottom wiring channel can be closed and adjusted.
- Vented front door and rear door enable ventilation and reliable operation. Rack's side panel can be easily assembled.
- Surface finish: degreasing, pickling, phosphoric, powder coating.
- Height, width, and depth selectable, full range of optional accessories.

Materials

Cold-rolled steel sheet. Thickness for frame 0.8mm, mounting rail 1.2mm, smoky grey glass 5mm.

Application

Widely used in network system, educational system, broadcasting system and telecommunication system. Suit for placing server computer and precision electronic equipments.