

LAN-RACK

19" rack 24HE H1380xB600xD1000mm
DPPD sort LRG-800



Anvendelse

19" Gulvrack for data og server installatoner. Leveres med 19" opspænding for og bag. 19": Electrosteel (ledende). Aflåselige sideplader. Perforerede døre for og bag, sikrer optimal ventilation. Aftagelig fordør, som kan højre/venstre vendes. Dobbelt perforerede døre bag. Forberedt for ventilation. Topplade med 3 kabelindgange. Bundplade med gæller og kabelindgang for og bag. Leveres med hjul og nivelevfødder.

Specifikation

Materiale: Pulverlakeret stål, 1,5 mm

Farve: Sort

Dør: Dobbelt perforeret pladedør

Lås: 1 punkt vridergreb Eurolock
Forberedt for: Ruko

Opspænding: 19" for og bag.
Electrosteel (ledende)

Størrelse: H1380xB600xD1000 mm

HE: 24HE

Max belastning: 800 kg

Jording: Forberedt for jord
(kobberstag)

Tilbehørs program: Stort


Leveres samlet

Hjul: 4 stk. nylon


Fødder: 4 stk. nivelevbare

Vare-nr.: 244034
EANr.: 5706683018435

19" rack 24HE H1380xB600xD1000mm DPPD sort LRG-800

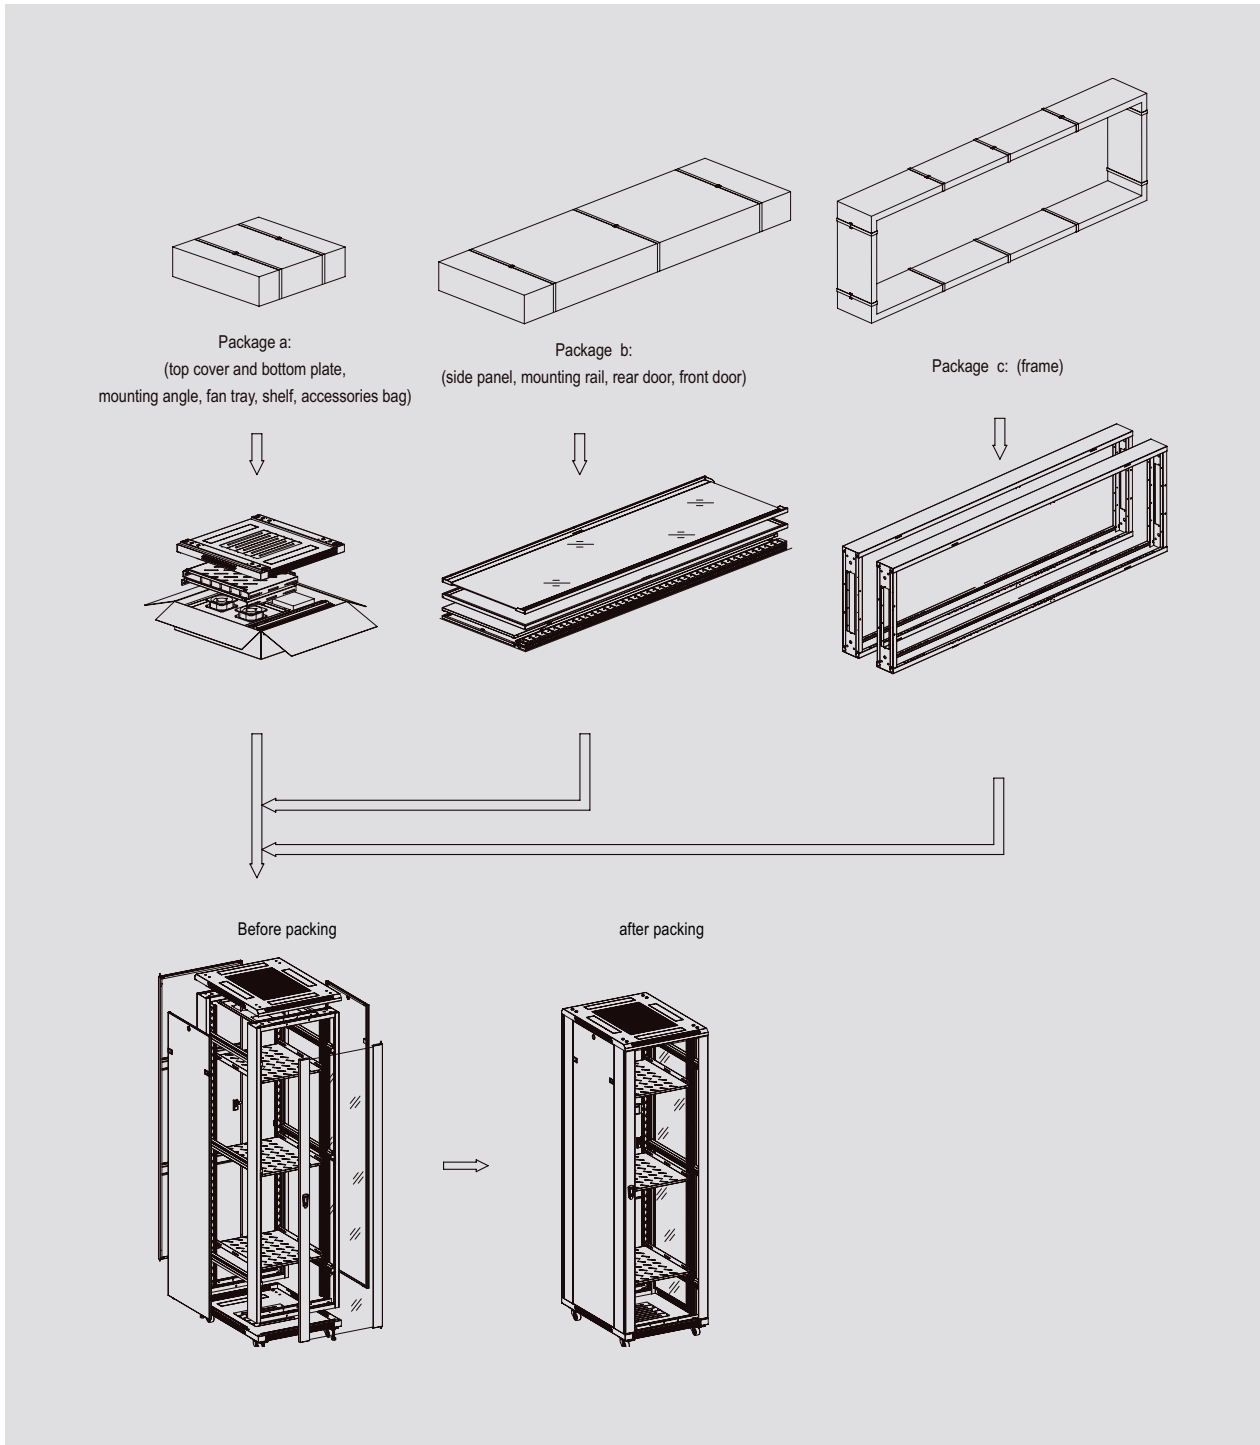


19" rack 24HE H1380xB600xD1000mm DPPD sort LRG-800

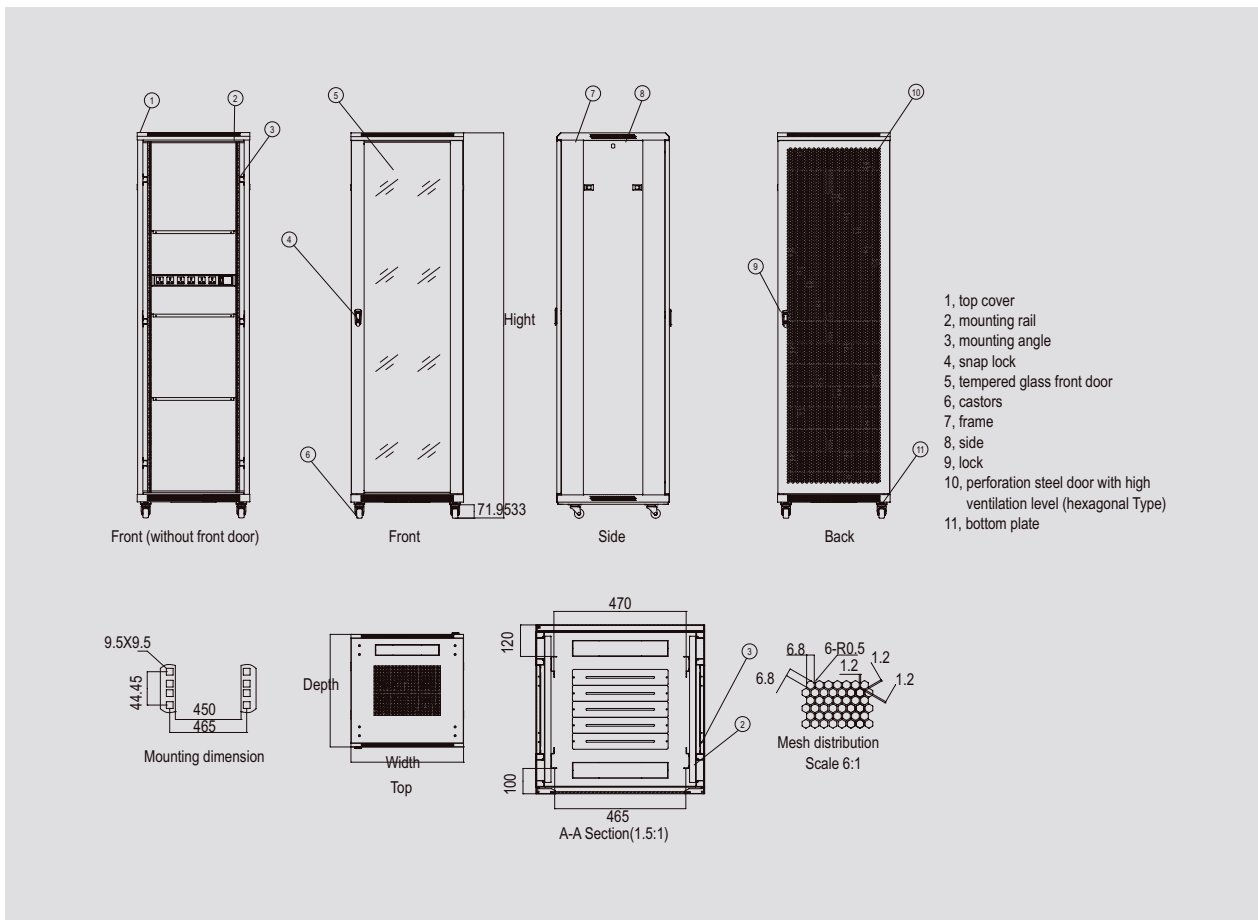

| S/N | Specification | Qty | Unit | Material | Surface Finish | Remark |
|-----|------------------|-----|------|-------------------------|----------------|------------------------------------|
| 1 | Top cover | 1 | Pcs | 1.2mm cold rolled steel | Powder coated | - |
| 2 | Rack | 2 | Pcs | 1.2mm cold rolled steel | Powder coated | - |
| 3 | Front door | 1 | Pcs | 1.2mm cold rolled steel | Powder coated | type door |
| 4 | Side panel | 4 | Pcs | 1.2mm cold rolled steel | Powder coated | With lock |
| 5 | Left rear door | 1 | Pcs | 1.2mm cold rolled steel | Powder coated | A type door |
| 6 | Lock | 1 | Pcs | - | - | - |
| 7 | Mounting rail | 6 | Pcs | 2.0mm cold rolled steel | Powder coated | - |
| 8 | Mounting angle | 4 | Pcs | 1.2mm cold rolled steel | Powder coated | - |
| 9 | Bottom plate | 6 | Pcs | 1.2mm cold rolled steel | Powder coated | - |
| 10 | Spacer | 2 | Pcs | - | - | Width 800mm |
| 11 | Fixed shelf | 1 | Pcs | 1.2mm cold rolled steel | Powder coated | 20pcs under 32u, 1pcs under 22u |
| 12 | Castors | 4 | Pcs | - | - | - |
| 13 | Feet | 4 | Pcs | - | - | - |
| 14 | Cage and nuts | 40 | sets | - | - | 20pcs under 32u |
| 15 | Fan | 4 | Pcs | - | - | 2 fans for 600mm depth |
| 16 | 6way power strip | 1 | Pcs | - | - | - |
| 17 | Wrench | 1 | Pcs | - | - | - |

19" rack 24HE H1380xB600xD1000mm DPPD sort LRG-800

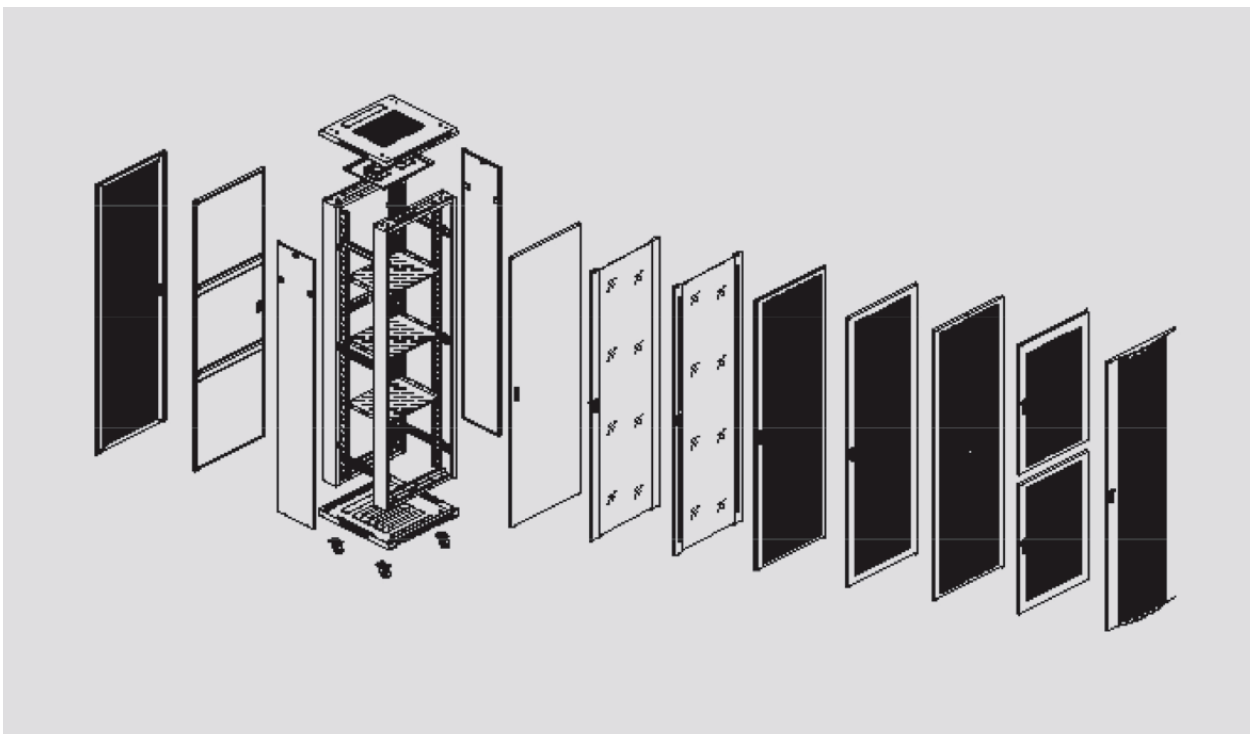

Standard

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard. Compatible with metric ETSI and 19 inch international standard.

Features

- Exquisite design with precise craftsmanship
- Good compatibility, adapt to more servers. Perfect ventilation
- Vented front door and rear door enable ventilation and reliable operation
- The top and bottom wiring channel can be closed and adjusted
- Optional plinth to meet under base wiring, ventilation and rat-proof
- Rack's side panel can be easily assembled
- Efficient and solid cabinet connection
- Adjustable feet and heavy duty castors are available at the same time , static loading: 800kg.(with adjustable feet)
- Advanced lock
- Surface finish: degreasing, pickling, phosphating, powder coating Available in black and gray
- Height, width, and depth selectable, full range of optional accessories.

Materials

Cold-rolled steel sheet. Thickness for frame 1.2mm, mounting rail 2.0mm(1.5mm for 600mm depth cabinet), fixed shelf 1.2mm , side panel 1.2mm. Thickness for smoky grey glass 5mm.

Application

Widely applied in finance, securities and data center; adopted by the professional servers' network providers as IBM, SUN, HP, COMPAQ, DELL etc.