


STRØMPANEL VERTIKAL MED AMP METER

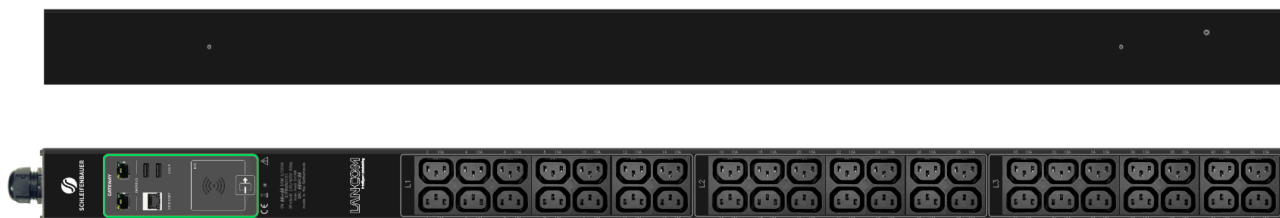

ANVENDELSE

PDU for vertikal montage i Rack.
Distribuerer strøm i Rack.


SPECIFIKATION

- Dimension: LxWxD
1090x65x52,5 mm
- Antal udtag: 42xC13
- Power input: Tre faser 16A,
230 / 400 V
- Input: 1xCEE plug + 3,0 m
5x2,5 mm² kabel
- Hus: Aluminium
- Farve: Sort

- Varenr.: 262120
- EANnr.: 5706683029592



STRØMPANEL VERTIKAL MED AMP METER

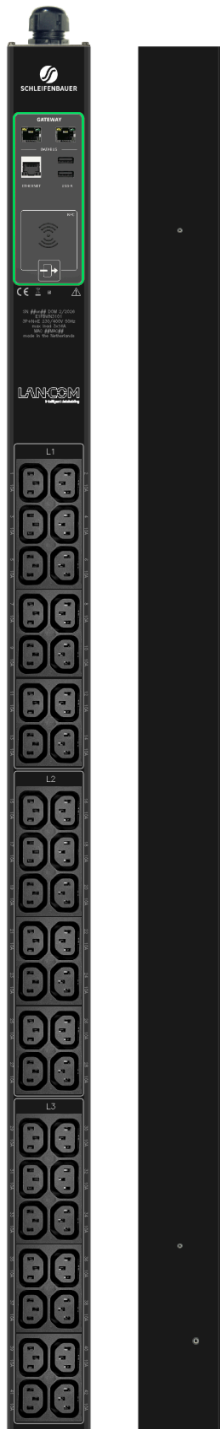






GM E1FBVIN3101 METERED PDU 5.0 GATEWAY

4. Summary:

- vertical PDU (0 U)
- three phase 16 A
- metered input
- 42 outlets

SPECIFICATIONS

GENERAL	Remote display using smartphone NFC app, up to 100 PDUs share one IP address, ESD safe, toolless hot swappable communications module	
CONNECTIVITY	Gateway Module: dual 1Gbps Ethernet (RJ45/USB), RJ45 daisy chain, USB expansion/sensor • TLS encrypted communication to complimentary Enertree PDU monitoring & management software	
ENCLOSURE	Profile color black, aluminium with stainless steel covers (IP20)	
DIMENSIONS	L x W x D = 1090 x 65 x 52.5 mm (0U) (excl. strain relief, mounting & cable bending radius)	
MOUNT	Toolless mount buttons (brackets not included) (distance=800, positions=145.0, 945.0mm)	
POWER INPUT	three phase 16 A, 230/400V - 50Hz	
CABLE ENTRY	power entry side-cover top	
CABLE & PLUG	Power lead (5G2,5 halogenfree) with CEE plug 3,0m (strain relief height 2,5cm)	
INPUT METERING	voltage (V), current (A), active power (W), apparent power (VA), reactive power (VAR), energy (kWh), apparent energy (VAh), frequency (Hz), power factor, crest factor, total harmonic distortion (%)	
OUTLETS	42 x IEC 60320 C13	
FUSES	n/a	

OM LAN-COM

LAN-COM A/S har siden 1991 leveret driftssikre netværksløsninger, bl.a. med egne systemer som GIGA-LAN (kobber) og LAN-OPTIC (fiber) designet til danske krav samt dag-til-dag levering fra Smørum. Vi er en stærk partner på både små installationer og de helt store projekter.

