


STRØMPANEL VERTIKAL MANAGED 24XC13 + 6XC19

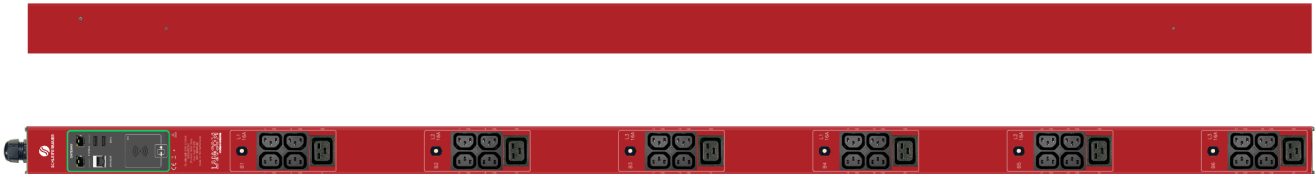

ANVENDELSE

PDU for vertikal montage i Rack.
Distribuerer strøm i Rack.


SPECIFIKATION

- Dimension: LxWxD
1700x65x52,5 mm
- Antal udtag: 24xC13 + 6xC19
- Power input: Tre faser 32A,
230 / 400 V
- Input: 1xCEE plug + 3,0 m 5x6
mm² kabel
- Hus: Aluminium
- Farve: Rød

- Varenr.: 262135
- EANnr.: 5706683029615



STRØMPANEL VERTIKAL MANAGED 24XC13 + 6XC19

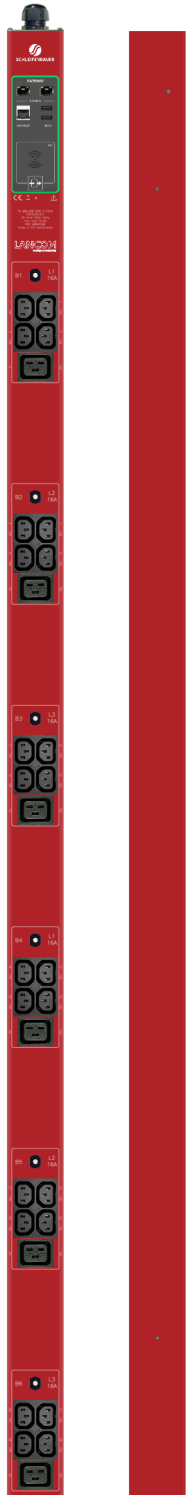






GM 56E6VIB3361 MANAGED PDU 5.0 GATEWAY

6. Summary:

- vertical PDU (0 U)
- three phase 32 A
- metered input
- metered outlets
- switched outlets
- 30 outlets

SPECIFICATIONS

GENERAL	Remote display using smartphone NFC app, up to 100 PDUs share one IP address, ESD safe, toolless hot swappable communications module	
CONNECTIVITY	Gateway Module: dual 1Gbps Ethernet (RJ45/USB), RJ45 daisy chain, USB expansion/sensor • TLS encrypted communication to complimentary EnerTree PDU monitoring & management software	
ENCLOSURE	Profile color red, aluminium with stainless steel covers (IP20)	
DIMENSIONS	L x W x D = 1700 x 65 x 52.5 mm (0U) (excl. strain relief, mounting & cable bending radius)	
MOUNT	Toolless mount buttons (brackets not included) (distance=1333, positions=183.2, 1516.8mm)	
POWER INPUT	three phase 32 A, 230/400V - 50Hz	
CABLE ENTRY	power entry side-cover top	
CABLE & PLUG	Power lead (5G6 halogenfree) with CEE plug 3,0m (strain relief height 2,5cm)	
INPUT METERING	voltage (V), current (A), active power (W), apparent power (VA), reactive power (VAR), energy (kWh), apparent energy (VAh), frequency (Hz), power factor, crest factor, total harmonic distortion (%)	
OUTLETS	24 x IEC 60320 C13 , 6 x IEC 60320 C19	
METERED OUTLETS	30 times voltage (V), current (A), active power (W), apparent power (VA), reactive power (VAR), energy (kWh), apparent energy (VAh), power factor, crest factor, total harmonic distortion (%)	
SWITCHED OUTLETS	30 times bistable near zero crossing switching relays	
FUSES	6 x Thermal breaker 16A	

OM LAN-COM

LAN-COM A/S har siden 1991 leveret driftssikre netværksløsninger, bl.a. med egne systemer som GIGA-LAN (kobber) og LAN-OPTIC (fiber) designet til danske krav samt dag-til-dag levering fra Smørum. Vi er en stærk partner på både små installationer og de helt store projekter.

