

## Bøjle for rør 1/2" galvaniseret stål




### Anvendelse

Anvendes til at fastgøre rør på væg eller loft.  
Bøjlen fastgøres med 2 skruer - **OBS** vær opmærksom på materiale valg vedr. skruerne for at unga galvanisk tæring mellem forskellige metaler.  
Anvendes stort set i alle industrier, kontorbyggeri, uddannelsesinstitutioner, hospitaler etc.

### Specifikation

Materiale: Rustfrit stål pregalvaniseret  
Størrelse: L56,6xB14,22 mm  
Diameter : Ø12,70 mm (1/2")  
Tolerance i %: ± 0,05  
Pakning: 1 stk.

## Bøjle for rør 1/2" galvaniseret stål

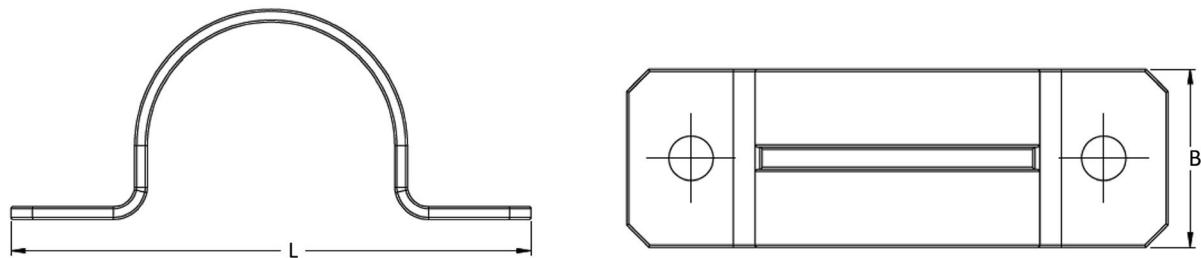

### CLASSIFICATION OF ENVIRONMENTS

Corrosion category	Loss of thickness µm/year	Typical environment	
		Outdoor	Indoor
C1 inconsiderable	>0,1	-	Heated buildings (offices, schools, stores etc.)
C2 Slight	>0,1 until 0,7	Little pollution Like rural areas	Not heated buildings with formation of condensate like store houses, coliseums
C3 Moderate	>0,7 until 2,1	City and industrial environments with moderate pollution	Highly humid production plants like laundry, brewery and diary
C4 Strong	>2,1 until 4,2	Industrial areas and coastlines with moderate salt impact	Chemical plants, swimming pools
C5-I Very strong (industrial)	>4,2 until 8,2	Industrial environment with high humidity and aggressive atmosphere	Buildings or areas with almost permanent condensation and pollution
C5-M Very strong (marine)	>4,2 until 8,2	Coastlines and offshore areas with high salt impact	Buildings or areas with almost permanent condensation and pollution