

STP RJ45 Keystone Jack Kategori 6



Anvendelse

GIGA-LAN Kategori 6 FTP Flip Jack monteres i Patch Panel samt udtag i GIGA-LAN data installationer. Smart lille design sørger for hurtig terminering uden brug af speciel værktøj. Mindste Keystone design sørger for ekstra plads i udtag.

Specifikation

Kategori: 6 FTP (skærmet)

Frekvens: 250 Mhz

Protokol: 1 Gbps Ethernet

POE+ 30 Wat

Type: Keystone

Farve hus: "Sølv"

Farve front: "Sølv"


Component Compliant

Godkendelse: Third part test lab

Fabrikat: GIGA-LAN STANDARD

Pakning: 1 stk

STP RJ45 Keystone Jack Kategori 6

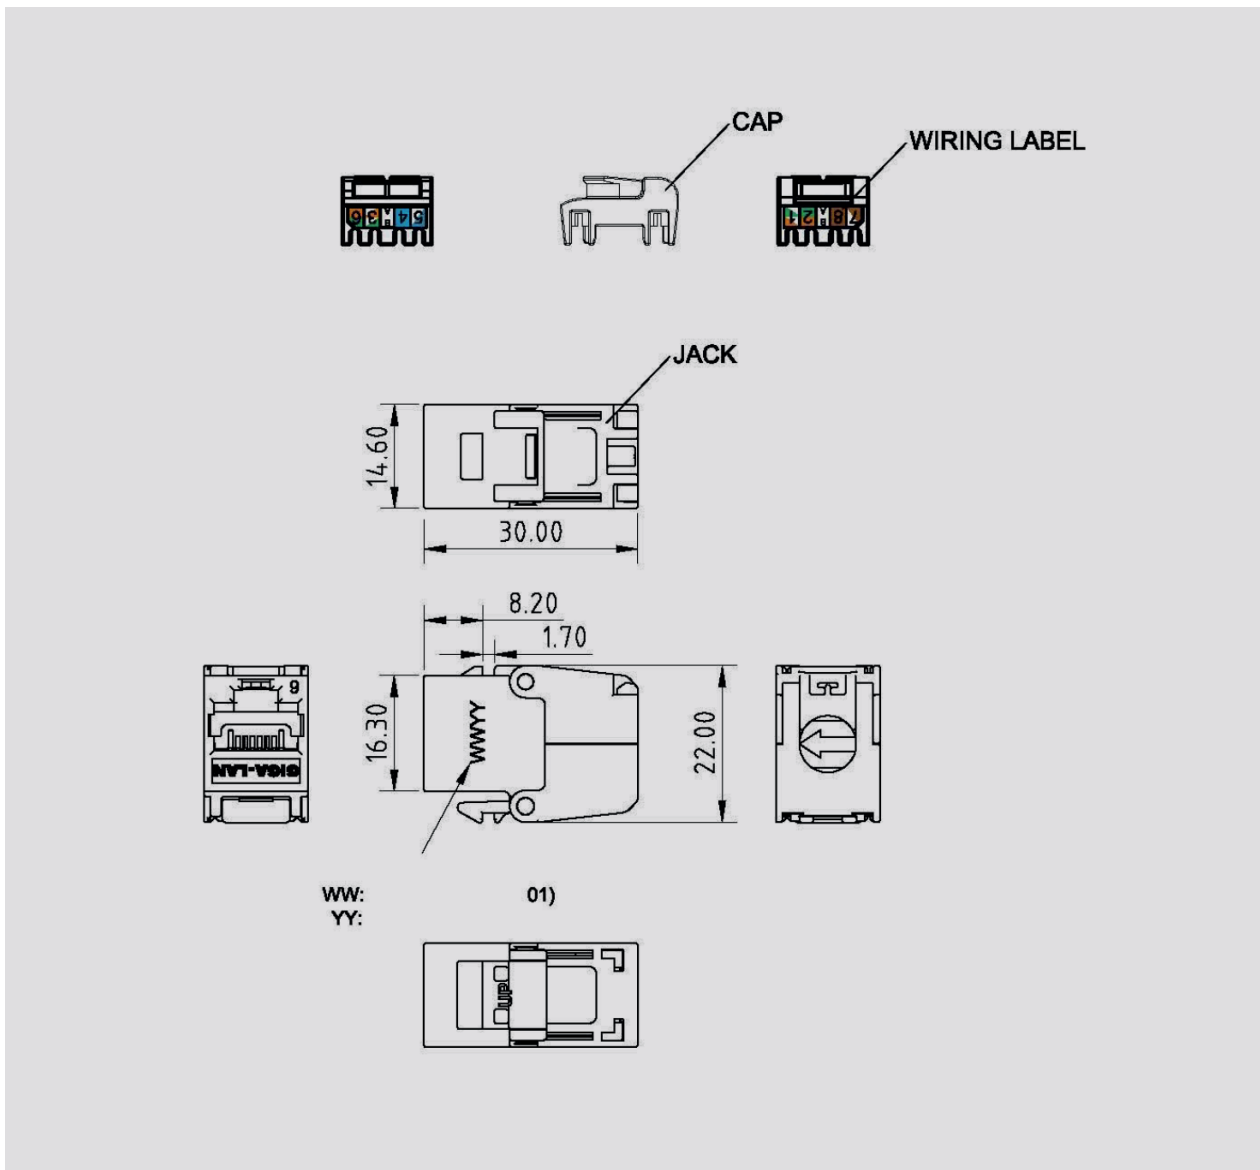

STP RJ45 Keystone Jack Kategori 6

Transmission performance

Meet all requirements specified in connecting hardware requirement of ANSI/TIA-568-C.2 Cat.6

Mechanical

Insertion / Extraction Life : 750 Cycles Minimum IDC
Wire Gauge : 22 - 24 AWG

Electrical

Electrical Insulation Resistance min.: 500 Mn @ 1 00V
d.c Dielectric Withstanding Voltage : 1 000V d.c. or a.c.
Peak Contact to Contact @ 60Hz for 1 minute.1500V d.c.
or a.c. Peak Contact to Test panel @ 60Hz for 1 minute.

Physical

Housing High-Impact, Flame-Retardant Plastic, UL
94V-0

Spring Wire : Phosphor Bronze Alloy Plated With
50 micro-inch of Gold

IDC : Phosphor Bronze Alloy With 100
micro-inch 100% Sn Alloy

Item	Part name	Q'TY
4	Cable tie	1
3	Instruction	1
2	Cap include wiring label	1
1	Jack	1